EDITION 2023 EN



Fabrics

Slat Colours

Construction Colours



TABLE OF **CONTENTS**

AWNING FABRICS 5

SOLID ACRYLIC FABRICS 8

WATERPROOF ACRYLIC FABRICS 15

ORCHESTRA ACRYLIC FABRICS 16

URBAN ACRYLIC FABRICS 17

LANDSCAPE MINI ACRYLIC FABRICS 18

LANDSCAPE ACRYLIC FABRICS 18

CLASSICAL ACRYLIC FABRICS 20

FANTASY ACRYLIC FABRICS 21

SCREEN FABRICS 27

SERGE 600 30

SERGE 1% 32

SERGE 600 BO LUNAR 33

POLYSCREEN® 550 34

POLYSCREEN® 550 GOLD & SILVER 35

POLYSCREEN® 350 36

POLYSCREEN® LUMINOUS 37

POLYSCREEN® 550 COUPAGE 38

POLYSCREEN® 314 BLACK OUT 39

SUNWORKER 40

SOLTIS® 92 41

SOLTIS® 99 42

VEROGLIM ACOUSTIC 43

PERGOLA SOLID FABRICS 44

SELT COLOURS 46

SLAT COLOURS 48

CONSTRUCTION COLOURS 50





AWNING FABRICS

80 UV

100% ACRYLIC

Permeability to air and water repellency

LLOYD'S REGISTER QUALITY ASSURANCE LTD ISO9001

DuPont Teflon

TEXTILES VERTRAUEN Schadstoffgeprüftes Textilien nach Öko-Tex Standard 100

Above pictograms apply to acrylic fabrics.



ACRYLIC **FABRICS**

Technical data shown below are average values of the current production Die angegebenen technischen Daten sind Durchschnittswerte der laufenden Produktion Les données techniques ci-dessous sont des valeurs moyennes de la production courante	**ACRYLIC**	
Fabric Gewebe Tissu		Acrylic 100%, solution dyed Acryl 100%, spinndüsengefärbt Acrylique, 100% teint masse
Finishing Ausrüstung Traitement		Teflon - Cleangard
Weight Gewicht Poids total	DIN EN 12127	~ 300 g/m²
Width Warenbreite Laize	DIN EN 1773	120 cm
Colour fastness Farbechtheit Solidité des coloris	DIN EN ISO 105-B02	7-8 / 8
Light fastness	DIN EN ISO 105-B04	7-8/8
Oil repellency Ölabweisung Oléofugation	EN ISO 14419	4-5
Water repellency Wasserabweisung Résistance au mouillage superficiel	EN ISO 4920	100
Water column Wassersäule Colonne d'eau	EN 20 811	~ 330 mm
Tensile strength (daN/5 cm) Höchstzugkraft (daN/5 cm) Résistance à la rupture (daN/5 cm)	DIN EN ISO 13934-1	~ 140 / 95
Tear resistance (daN) Weft/Warp Weiterreißkraft (daN) Schuss/Kette Résistance à la déchirure (daN) Trame/Chaîne	EN ISO 13937-2	2.3 / 4

Acrylic fabrics guarantee the highest quality of the product, providing thermal comfort and protection against UV radiation. Made 100% out of acrylic fibre, dyed in chemical solution, provide excellent protection against colour loss. UV resistance coefficient is 7-8 at 8° scale. Impregnation with use of TEFLON® or SCOTCHGARD™ agents provides an excellent protective barrier and strengthens water-repellent qualities of the fabric, also preventing dirt adhering. Resistance to leaking: 330 mm water column. The advantage of acrylic fabric is also high resistance to tensile and tear.



WATERPROOF **FABRICS**

Technical data shown below are average values of the current production Die angegebenen technischen Daten sind Durchschnittswerte der laufenden Produktion Les données techniques ci-dessous sont des valeurs moyennes de la production courante	**ACRYLIC WATERPROOF**	
Fabric Gewebe Tissu		Acrylic 100%, solution dyed Acryl 100%, spinndüsengefärbt Acrylique 100% teint masse
Finishing Ausrüstung Traitement		Teflon - Cleangard
Weight Gewicht Poids total	DIN EN 12127	~ 330 g/m²
Width Warenbreite Laize	DIN EN 1773	120 cm
Colour fastness Farbechtheit Solidité des coloris	DIN EN ISO 105-B02	7-8 / 8
Light fastness	DIN EN ISO 105-B04	7-8/8
Oil repellency Ölabweisung Oléofugation	EN ISO 14419	4-5
Water repellency Wasserabweisung Résistance au mouillage superficiel	EN ISO 4920	100
Water column Wassersäule Colonne d'eau	EN 20 811	~ 1000 mm
Tensile strength (daN/5 cm) Höchstzugkraft (daN/5 cm) Résistance à la rupture (daN/5 cm)	DIN EN ISO 13934-1	~ 140 / 95
Tear resistance (daN) Weft/Warp Weiterreißkraft (daN) Schuss/Kette Résistance à la déchirure (daN) Trame/Chaîne	EN ISO 13937-2	3 / 4

Waterproof acrylic fabrics are characterized by increased resistance to leaking - about 1000 mm water column. Weave structure together with modern impregnation technology provides high air permeability even on hot days. Oeko-Tex® guarantees that offered acrylic fabrics, subjected to special impregnation for water resistance, are not toxic.

SOLID


ACRYLIC FABRICS

BLANCO



2042 UV: 97% GTOT: 18%

TANDEM BLANCO

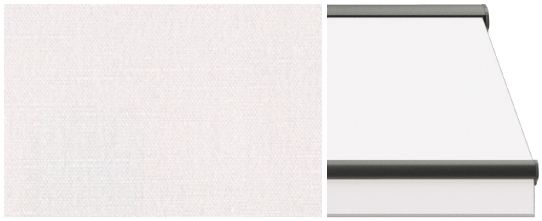


8442 UV: 40% GTOT: 18%

NATURAL




2929 UV: 97% GTOT: 18%

MARFIL

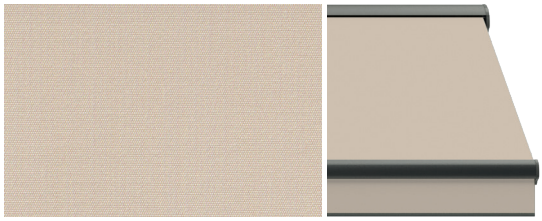


2143 UV: 97% GTOT: 16%

SIROCO

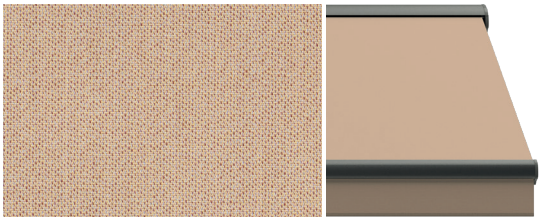


2226 UV: 98% GTOT: 12%

VANILLA

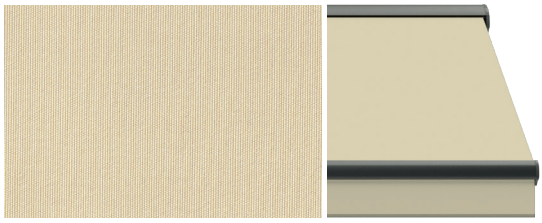


2687 UV: 97% GTOT: 17%

AMBER BEIGE

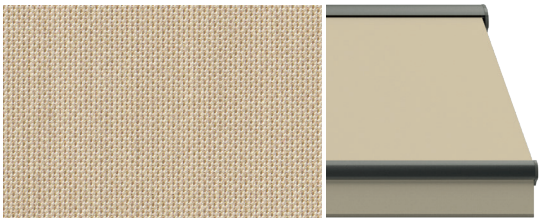


0814 UV: 99% GTOT: 15.66%

BEIGE

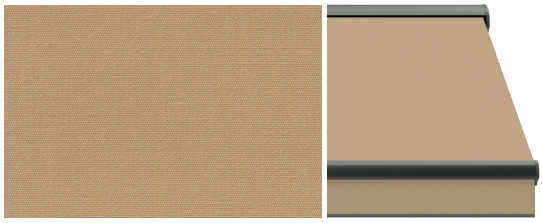

2038 UV: 99% GTOT:11%

INTEGRAL

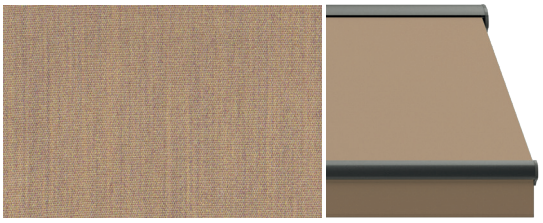


2838 UV: 99% GTOT: 8%

BERNA



2041 UV: 97% GTOT: 16%


NUAGES FLAME*

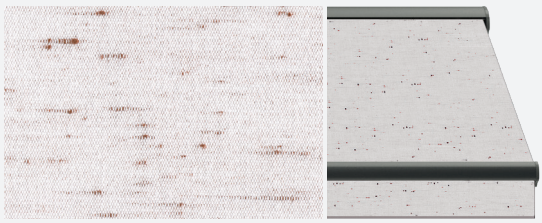

6319 UV: 90% GTOT: 16%


*Until stock lasts

AVENA

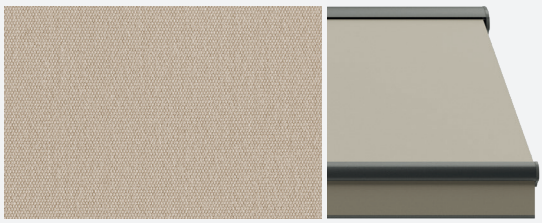


2296 UV: 98% GTOT: 11%

LIN MELANGE

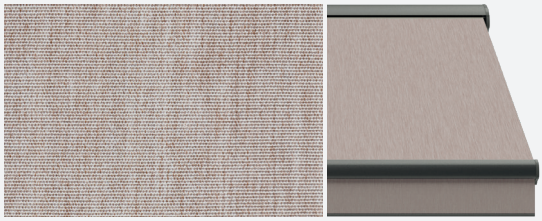


8904 UV: 95% GTOT: 11%

TWEED BROWN

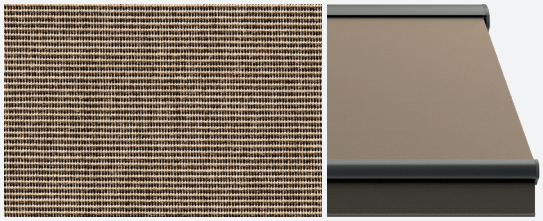


0403 UV: 99% GTOT: 6.82%

MINERAL

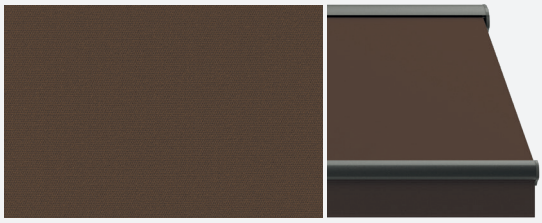


2831 UV: 99% GTOT: 7%

VISION

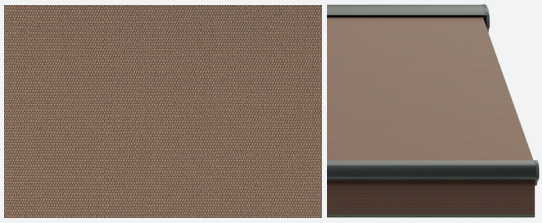


2250 UV: 99% GTOT: 7%

CHAUME PIGUE

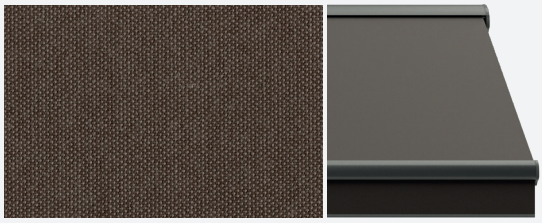

U235 UV: 100% GTOT: 9%

CAFE

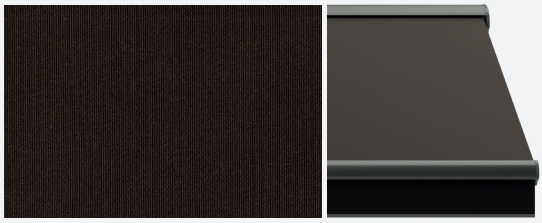


2316 UV: 99% GTOT: 5%

MARBLE



0923 UV: 99% GTOT: 12.8%

TWEED LATTE

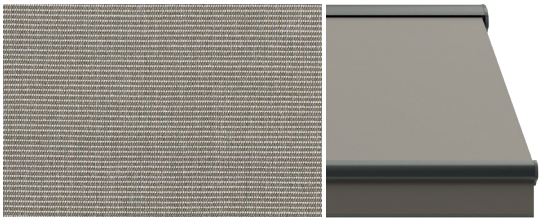


7926 UV: 98% GTOT: 15%

SNOWFLAKE




3463 UV: 95% GTOT: 22%

TWEED ARGENT

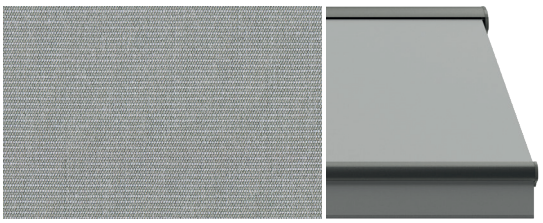


0794 UV: 98% GTOT: 19%

DARK LINEN

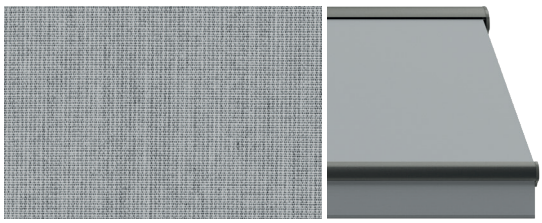


6727 UV: 98% GTOT: 18%

SILVER WHITE

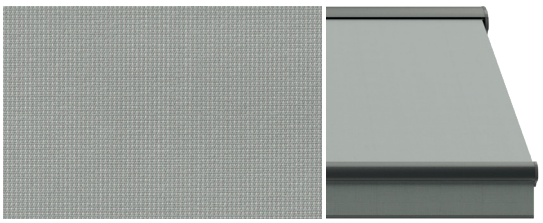


0364 UV: 99% GTOT: 7.67%

SILVER MELANGE

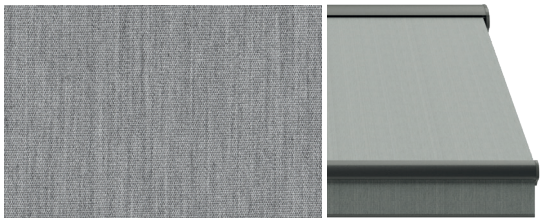


0028 UV: 99% GTOT: 7.36%

TANDEM PIEDRA

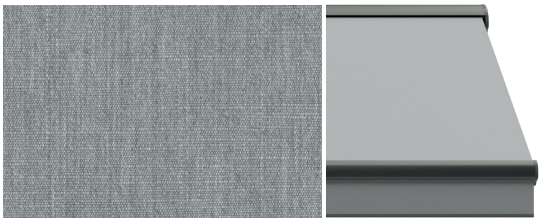


8445 UV: 80% GTOT: 7%

IRON

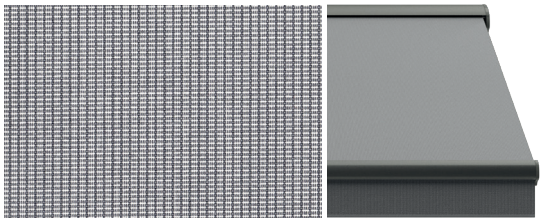

0937 UV: 99% GTOT: 6.57%

TWEED ROCK

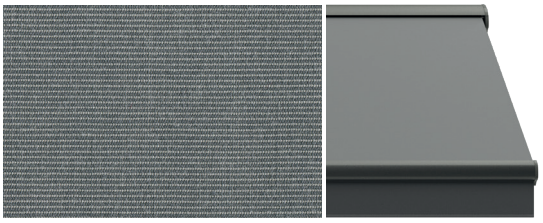


7151 UV: 98% GTOT: 11%

SILVER




2821 UV: 97% GTOT: 13%

SILVER GREY

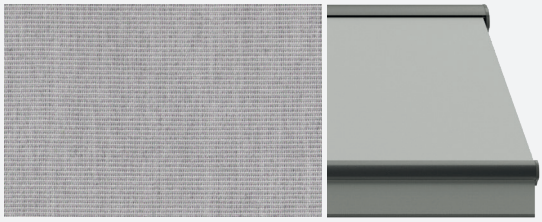


U190 UV: 90% GTOT: 15%

ZIP GREY

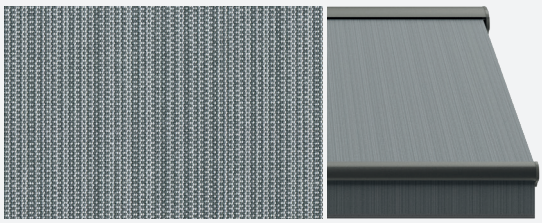


1597 UV: 98% GTOT: 13%

ZINC

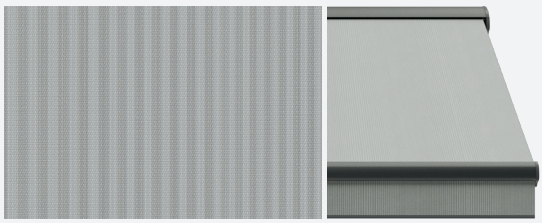


2802 UV: 99% GTOT: 11%

PIETRA BEIGE

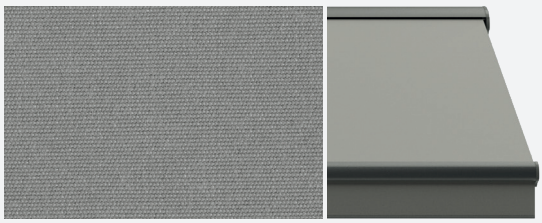


9415 UV: 98% GTOT: 8%

PERLA

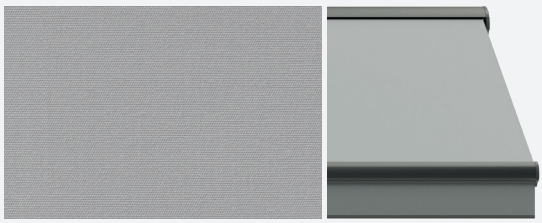


2979 UV: 97% GTOT: 8%

ASH

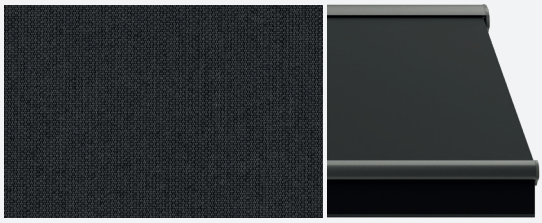

0638 UV: 99% GTOT: 5.05%

ANTRACITA

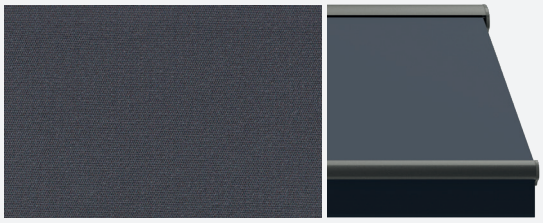

8488 UV: 99% GTOT: 6%

TANDEM GRAFITO




8446 UV: 80% GTOT: 6%

EBONY TWEED




7324 UV: 98% GTOT: 10%

NEGRO

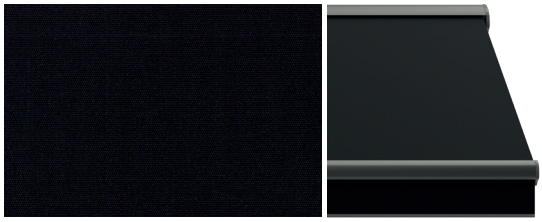


2170 UV: 99% GTOT: 5%

GRAPHITE ZIP

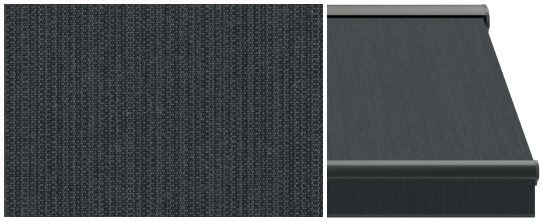


1524 UV: 98% GTOT: 12%

BASALT

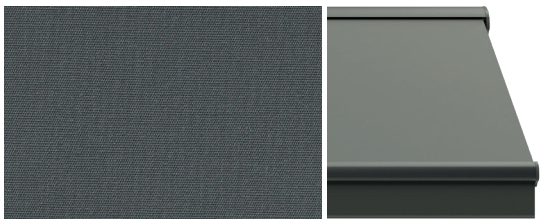


8203 UV: 100% GTOT: 5%

FLANELLE

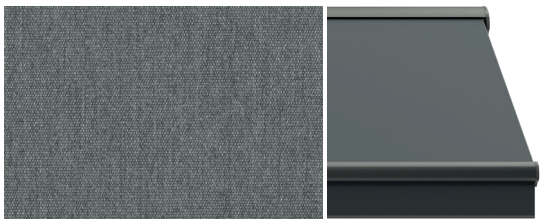


U104 UV: 100% GTOT: 5%

CHARCOAL TWEED

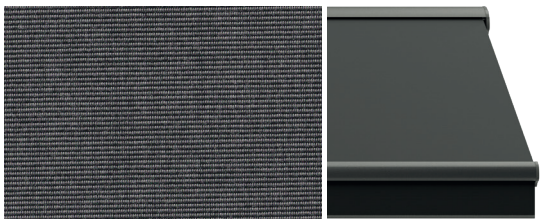


0402 UV: 99% GTOT: 5%

STITCH ANDESITE

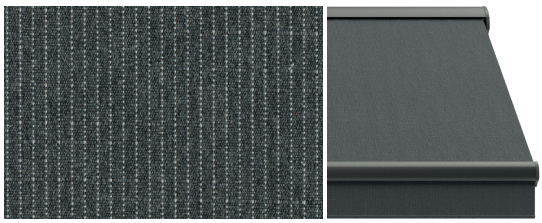


0512 UV: 98% GTOT: 8%

STITCH CALCITE

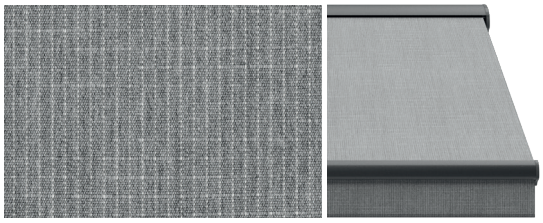

0505 UV: 98% GTOT: 9%

STITCH RUBY

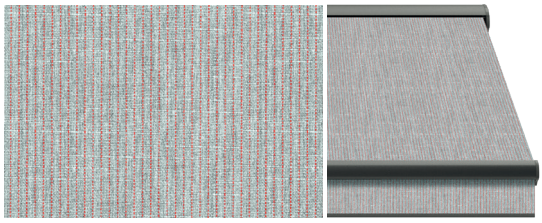


0507 UV: 98% GTOT: 9%

WHITE LINEN




8615 UV: 95% GTOT: 18%

PLATINUM

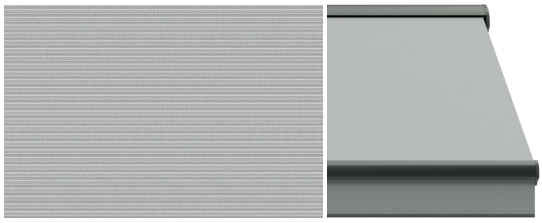

0715 UV: 90% GTOT: 12%

BREEZE

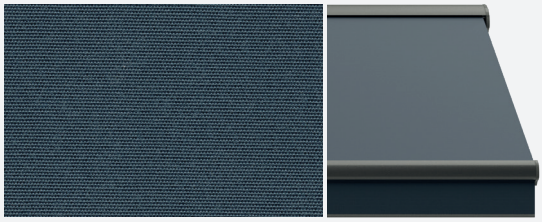


2777 UV: 99% GTOT: 6%

MARINE




2145 UV: 99% GTOT: 5%

AZUL

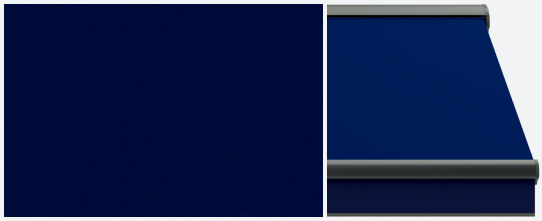


2018 UV: 99% GTOT: 7%

ORANGE

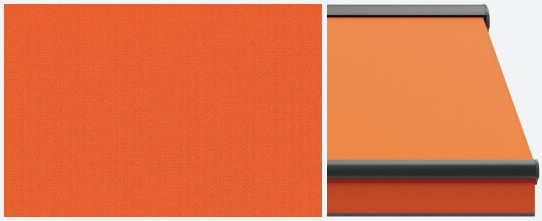


2050 UV: 99% GTOT: 13%

BRIGHT RED

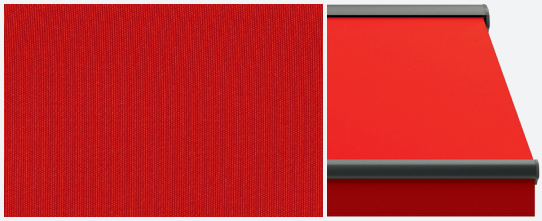

2211 UV: 99% GTOT: 10%


PIMENT PIGUE*

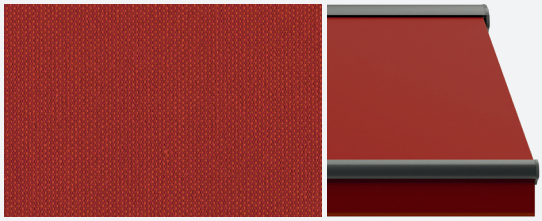

U412 UV: 100% GTOT: 10%


*Until stock lasts

RIOJA

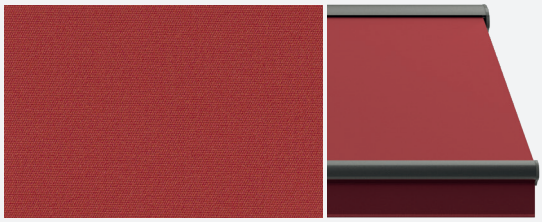


2210 UV: 99% GTOT: 8%

CARMIN PIGUE

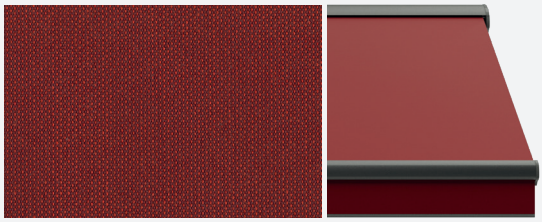

U411 UV: 100% GTOT: 10%

GRANATE

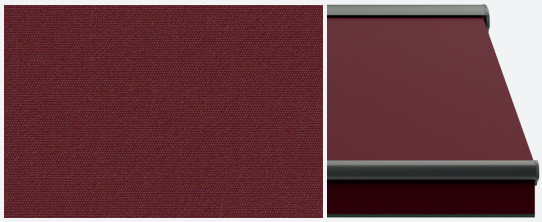

2101 UV: 99% GTOT: 6%


SWITCH ROUGE*



U390 UV: 100% GTOT: 8%

*Until stock lasts


MARSEILLE FLAME*

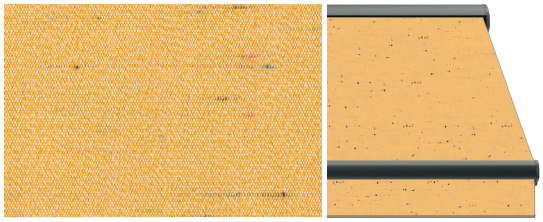

8854 UV: 100% GTOT: 11%


*Until stock lasts

AMARILLO

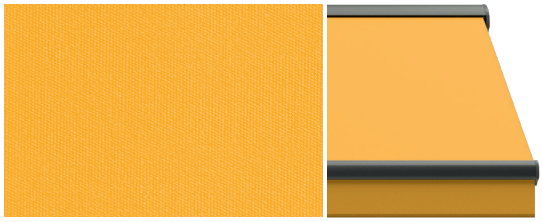


2013 UV: 99% GTOT: 15%

CURRY

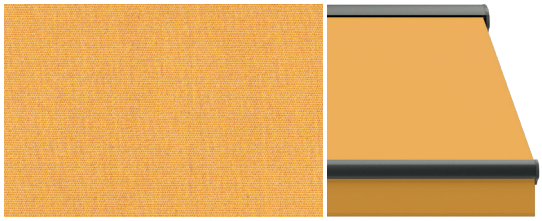


U105 UV: 100% GTOT: 12%

OCRE

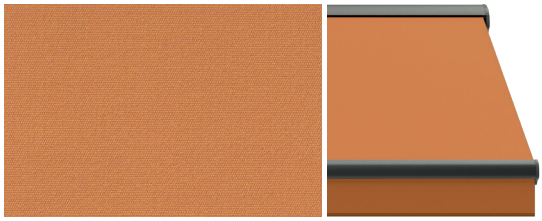


2180 UV: 99% GTOT: 13%

POTIRON PIGUE

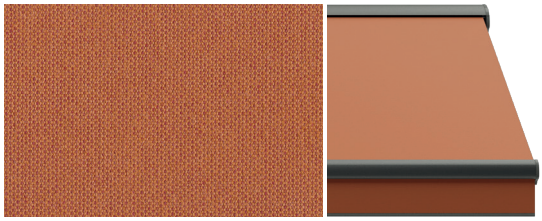


U413 UV: 100% GTOT: 10%

JADE

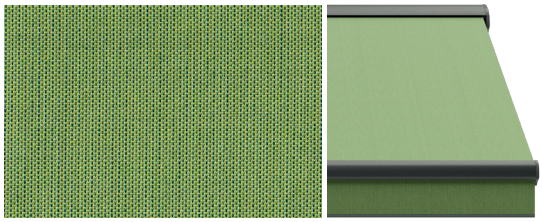

0396 UV: 99% GTOT: 8.12%


MELEZE PIGUE*

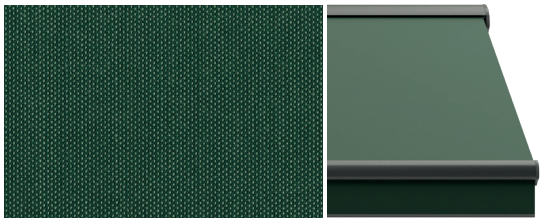

U417 UV: 100% GTOT: 8%

*Until stock lasts

VERDE BOTELLA

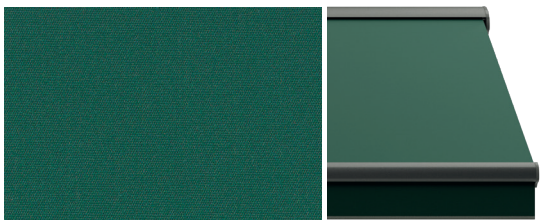

2245 UV: 99% GTOT: 6%

WATERPROOF


ACRYLIC FABRICS

BLANCO




8268 UV: 97% GTOT: 18%

MARFIL

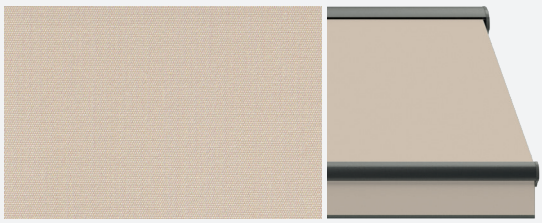


8272 UV: 97% GTOT: 16%

AMARILLO

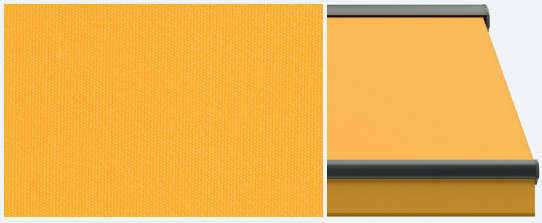


8265 UV: 99% GTOT: 15%

COCO

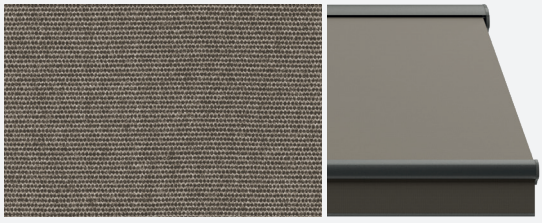


2047 UV: 99% GTOT: 9%

GRIS

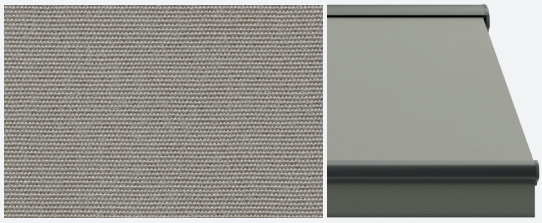


8271 UV: 99% GTOT: 7%

ANTRACITA

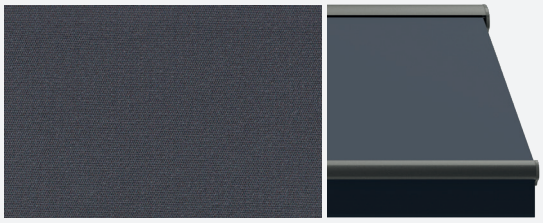


2796 UV: 99% GTOT: 6%

TWEED NEGRO

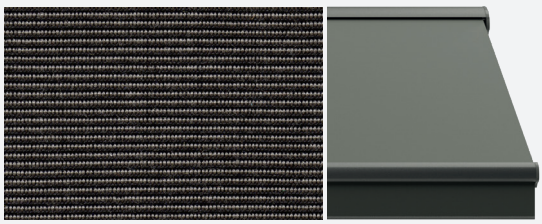

2085 UV: 99% GTOT: 6%

NEGRO

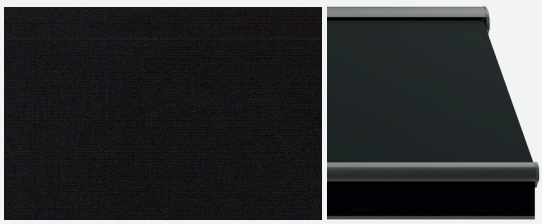


8275 UV: 99% GTOT: 5%

ORCHESTRA


ACRYLIC FABRICS

NAPLES LINEN

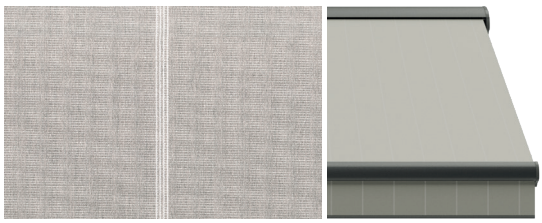


D307 UV: 95% GTOT: 13% RAPPORT: 20 cm

NAPLES HEATHER

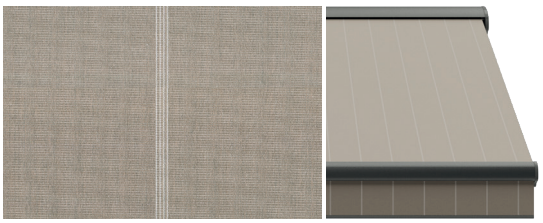


D305 UV: 90% GTOT: 11% RAPPORT: 20 cm

NAPLES LIGHT GREY

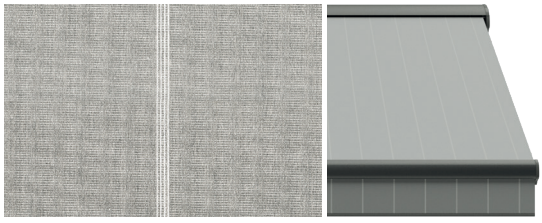


D304 UV: 90% GTOT: 11% RAPPORT: 20 cm

NAPLES STONE

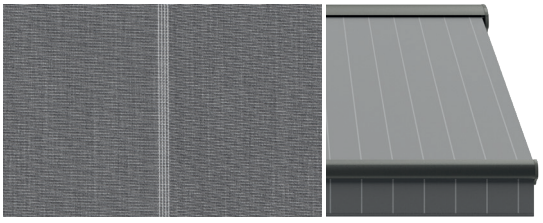

D113 UV: 95% GTOT: 7% RAPPORT: 20 cm


PENCIL BEIGE*

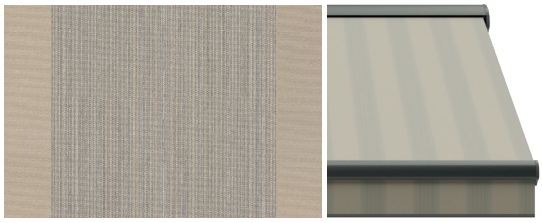

D324 UV: 95% GTOT: 14% RAPPORT: 30 cm


*Until stock lasts

PENCIL YELLOW

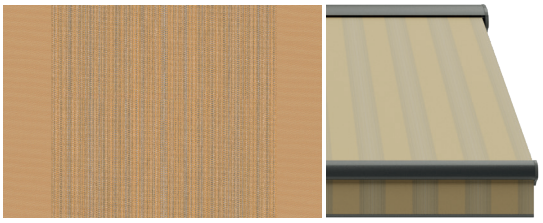


D323 UV: 95% GTOT: 13% RAPPORT: 30 cm

PENCIL DARK GREY

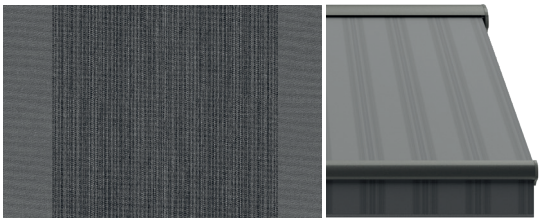

D319 UV: 100% GTOT: 8% RAPPORT: 30 cm

WIDE CHINE YELLOW*

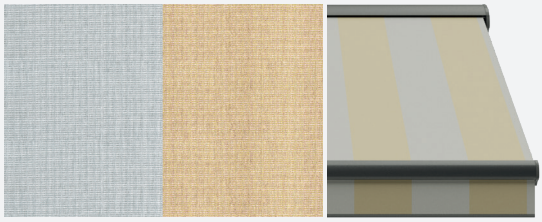

D300 UV: 95% GTOT: 13% RAPPORT: 60 cm

*Until stock lasts


WIDE CHINE BEIGE*



D301 UV: 95% GTOT: 12% RAPPORT: 60 cm

*Until stock lasts

WIDE CHINE GREEN*

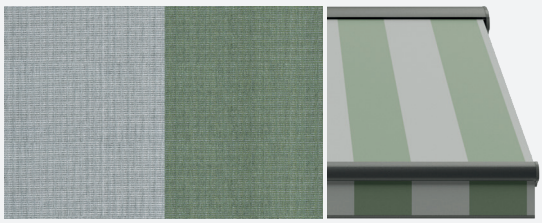

D299 UV: 95% GTOT: 10% RAPPORT: 60 cm

*Until stock lasts

URBAN


ACRYLIC FABRICS

CANDLELIGHT




0990 UV: 99% GTOT: 14% RAPPORT: 6 cm

LANTERN

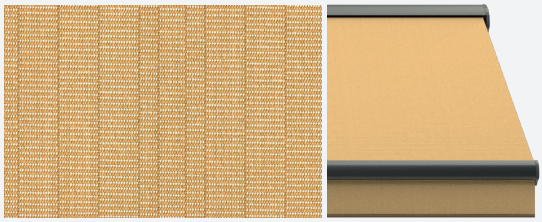

0991 UV: 99% GTOT: 14.2% RAPPORT: 6 cm

CONCRETE

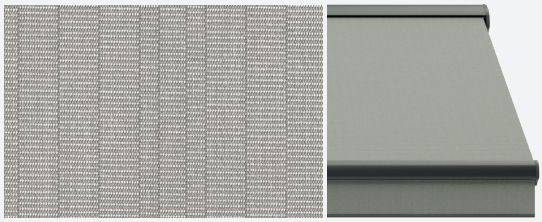

0993 UV: 99% GTOT: 10.8% RAPPORT: 6 cm

TIMBER




0992 UV: 99% GTOT: 9.6% RAPPORT: 6 cm

LANDSCAPE MINI


ACRYLIC FABRICS

CLAY

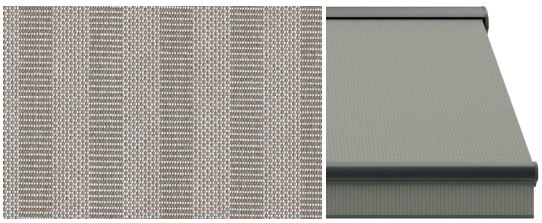


4627 UV: 99% GTOT: 11.3% RAPPORT: 2 cm

SAND

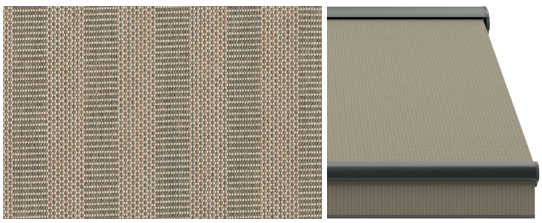


4620 UV: 99% GTOT: 11.4% RAPPORT: 2 cm

GRAVEL

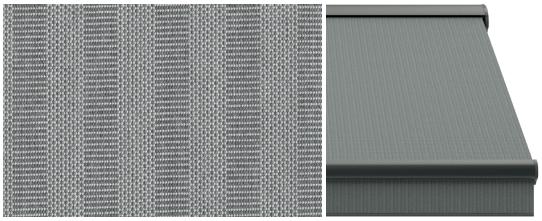

4621 UV: 99% GTOT: 8.1% RAPPORT: 2 cm

LAVA

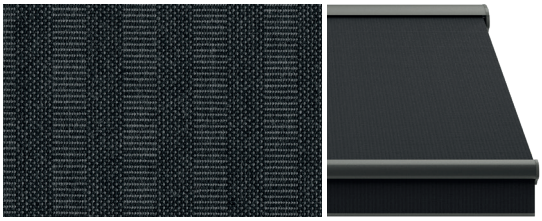


4623 UV: 99% GTOT: 8.3% RAPPORT: 2 cm

LANDSCAPE


ACRYLIC FABRICS

ROSOPSIDA

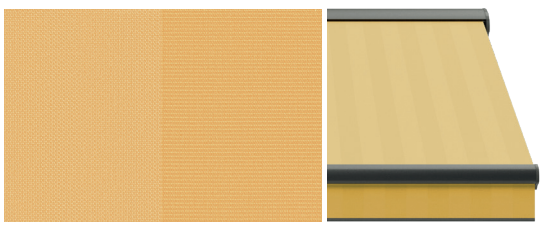

4657 UV: 99% GTOT: 14.96% RAPPORT: 24 cm

GOBI

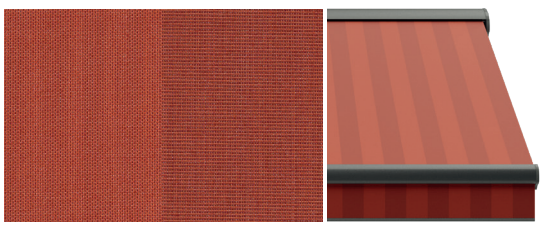


4658 UV: 99% GTOT: 11.32% RAPPORT: 24 cm

BEACH



4662 UV: 99% GTOT: 16.37% RAPPORT: 24 cm

SAHARA DUST

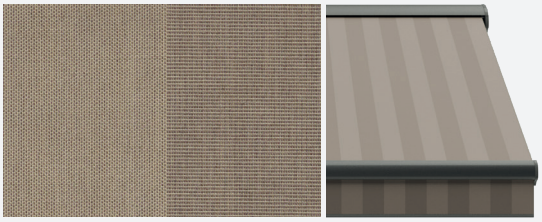


4639 UV: 99% GTOT: 10.18% RAPPORT: 24 cm

CLIFFS




4643 UV: 99% GTOT: 6.78% RAPPORT: 24 cm

LADAKH

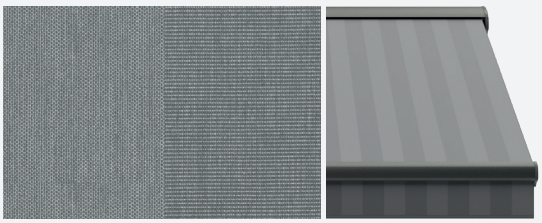


4655 UV: 99% GTOT: 5.91% RAPPORT: 24 cm

FJORD

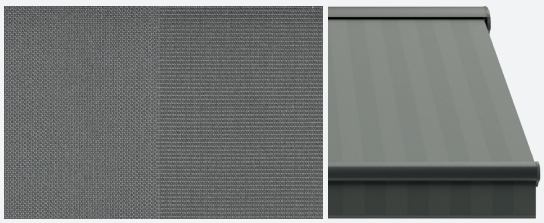

4644 UV: 99% GTOT: 7.8% RAPPORT: 24 cm

NAMIB

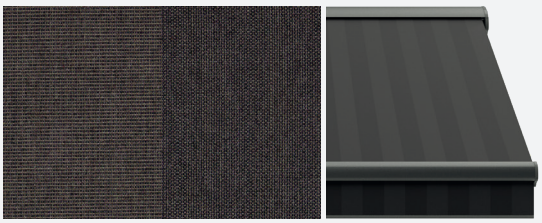

4640 UV: 99% GTOT: 5.04% RAPPORT: 24 cm

VULCANO




4665 UV: 99% GTOT: 5% RAPPORT: 24 cm

CLASSICAL

ACRYLIC FABRICS

CLASSICAL GRIS

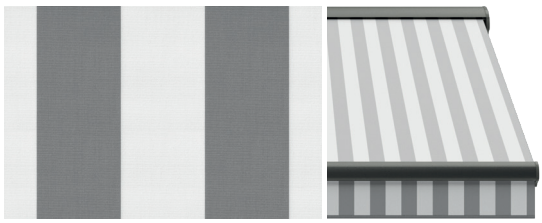


2103 UV: 97% GTOT: 16% RAPPORT: 20 cm

CLASSICAL AMARILLO



2015 UV: 97% GTOT: 15% RAPPORT: 20 cm

CLASSICAL MOSSY TWEED

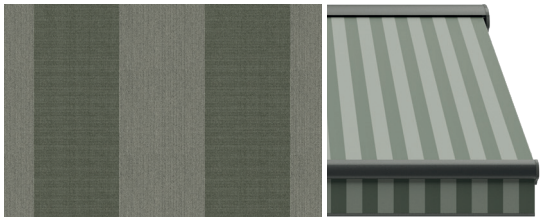

9878 UV: 98% GTOT: 15% RAPPORT: 20 cm

CLASSICAL BEIGE



2275 UV: 98% GTOT: 14% RAPPORT: 20 cm

CLASSICAL MARRON-BEIGE



2148 UV: 99% GTOT: 9% RAPPORT: 20 cm

FANTASY


ACRYLIC FABRICS

MILANO




3868 UV: 95% GTOT: 22% RAPPORT: 30 cm

CALGARY

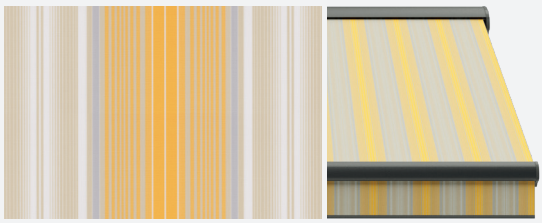

6712 UV: 95% GTOT: 16% RAPPORT: 30 cm

SUNRISE

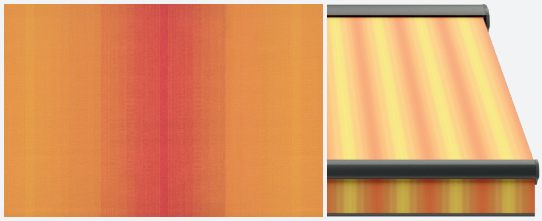


0180 UV: 99% GTOT: 14.73% RAPPORT: 30 cm

PALERMO



3605 UV: 90% GTOT: 21% RAPPORT: 17 cm

ARGENTINA

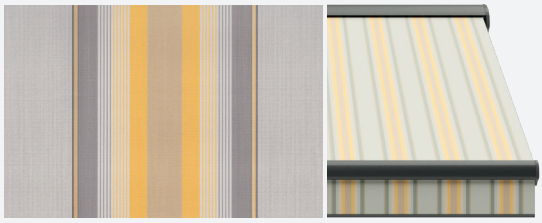


2016 UV: 98% GTOT: 15% RAPPORT: 30 cm

TARANTO




3672 UV: 95% GTOT: 21% RAPPORT: 24 cm

CANBERRA

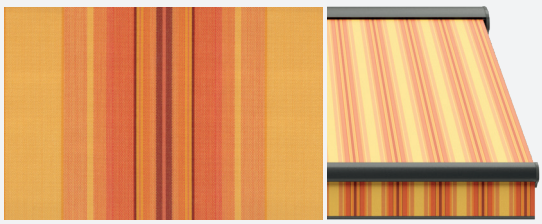

0452 UV: 98.75% GTOT: 15.51% RAPPORT: 24 cm

DAKAR

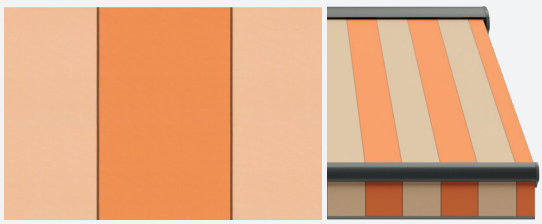


2080 UV: 98% GTOT: 15% RAPPORT: 40 cm

SALERNO




3861 UV: 90% GTOT: 20% RAPPORT: 30 cm

ALBERTA

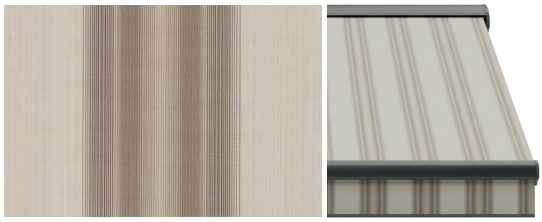

5106 UV: 98% GTOT: 15% RAPPORT: 30 cm

MANCHESTER

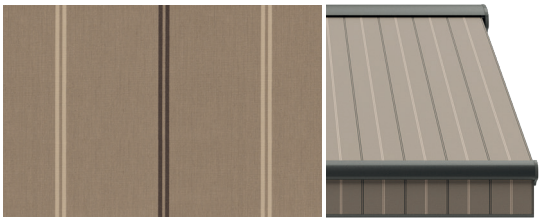


2823 UV: 98% GTOT: 8% RAPPORT: 24 cm

HARDELOT NATURE



8935 UV: 95% GTOT: 14% RAPPORT: 30 cm

SIENNE NATURE

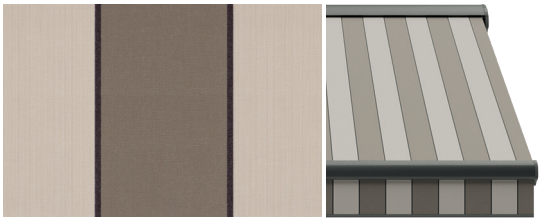


D100 UV: 95% GTOT: 14% RAPPORT: 30 cm

TEXAS




2238 UV: 98% GTOT: 13% RAPPORT: 30 cm

PERU

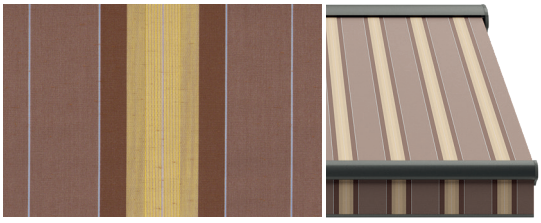


2201 UV: 98% GTOT: 14% RAPPORT: 30 cm

ANDRIA

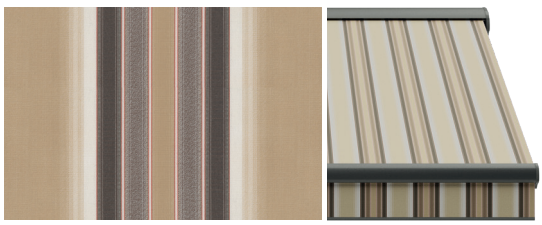

3881 UV: 95% GTOT: 18% RAPPORT: 30 cm

MARTE

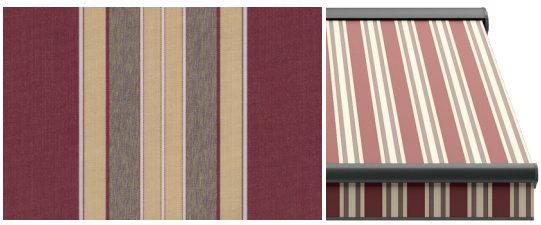


2121 UV: 99% GTOT: 11% RAPPORT: 24 cm

BOLOGNA




3427 UV: 90% GTOT: 22% RAPPORT: 20 cm

JAMAICA

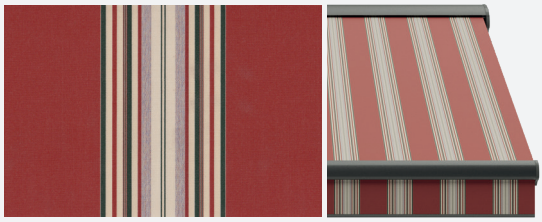


2701 UV: 98% GTOT: 14% RAPPORT: 30 cm

BRISBANE

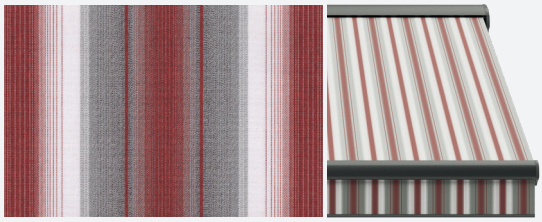


0186 UV: 98.1% GTOT: 10.26% RAPPORT: 24 cm

EDMONTON

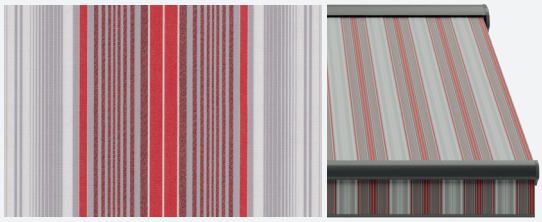

6711 UV: 98% GTOT: 13% RAPPORT: 30 cm

WINTONE

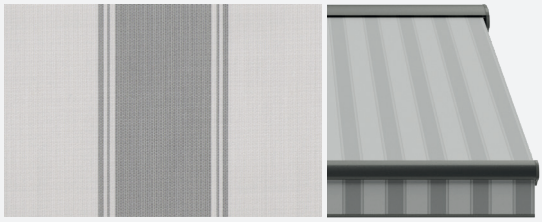


0734 UV: 97.5% GTOT: 12.39% RAPPORT: 24 cm

FOGGIA




3864 UV: 95% GTOT: 18% RAPPORT: 30 cm

BROKEN HILL

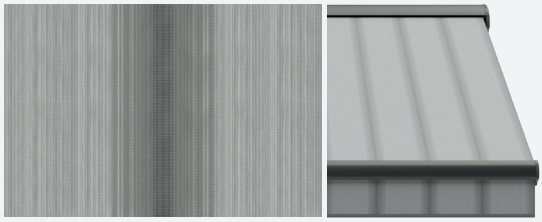


0497 UV: 95% GTOT: 16% RAPPORT: 30 cm

NEW YORK

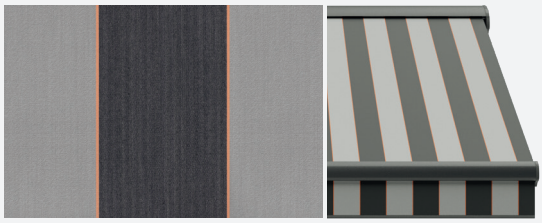


2174 UV: 98% GTOT: 14% RAPPORT: 30 cm

METROPOLITAN

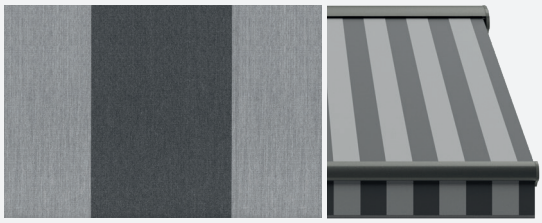


3608 UV: 99% GTOT: 7% RAPPORT: 30 cm

GLADSTONE

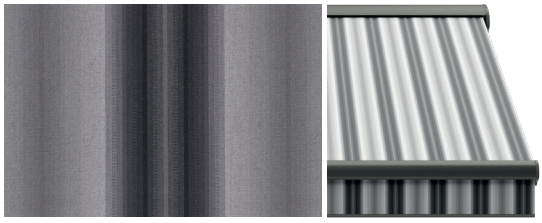


0493 UV: 99% GTOT: 7.78% RAPPORT: 24 cm

SIENNE STONE

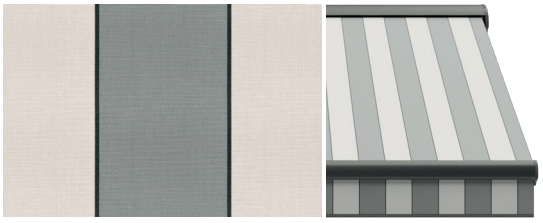


8931 UV: 95% GTOT: 13% RAPPORT: 30 cm

PLUTON

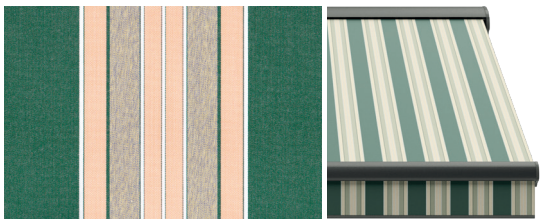


2179 UV: 99% GTOT: 10% RAPPORT: 24 cm

RAVENNA

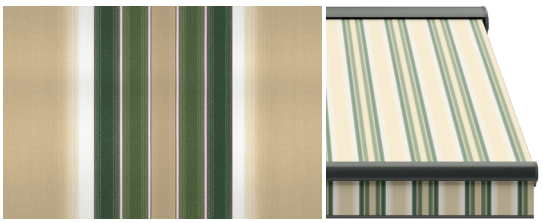


3882 UV: 95% GTOT: 18% RAPPORT: 30 cm

FIRENZE

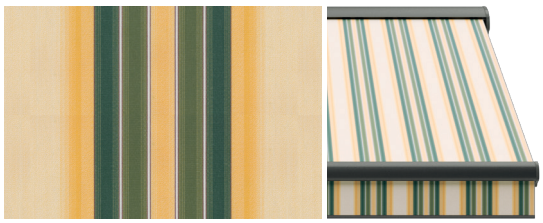


3889 UV: 90% GTOT: 20% RAPPORT: 30 cm

MELBOURNE

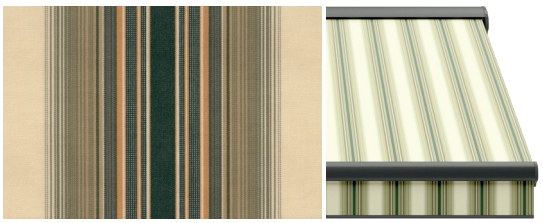


0054 UV: 99% GTOT: 11.74% RAPPORT: 24 cm

ORLANDO

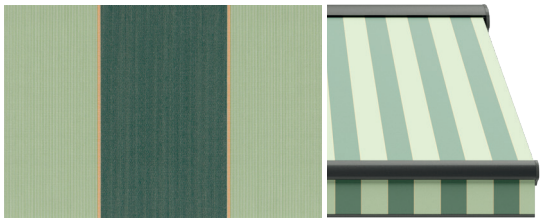


2191 UV: 98% GTOT: 11% RAPPORT: 30 cm

CANADA

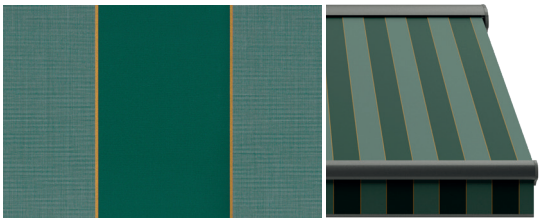

2061 UV: 99% GTOT: 8% RAPPORT: 30 cm

PADOVA

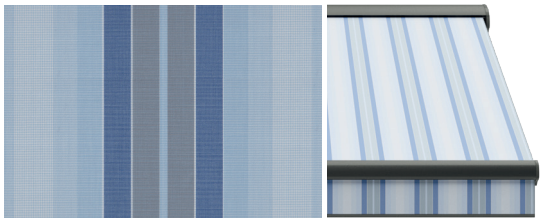

3875 UV: 95% GTOT: 17% RAPPORT: 30 cm


ANCONA



3746 UV: 90% GTOT: 19% RAPPORT: 24 cm

FABRIC RAPPORT

ACRYLIC FABRICS

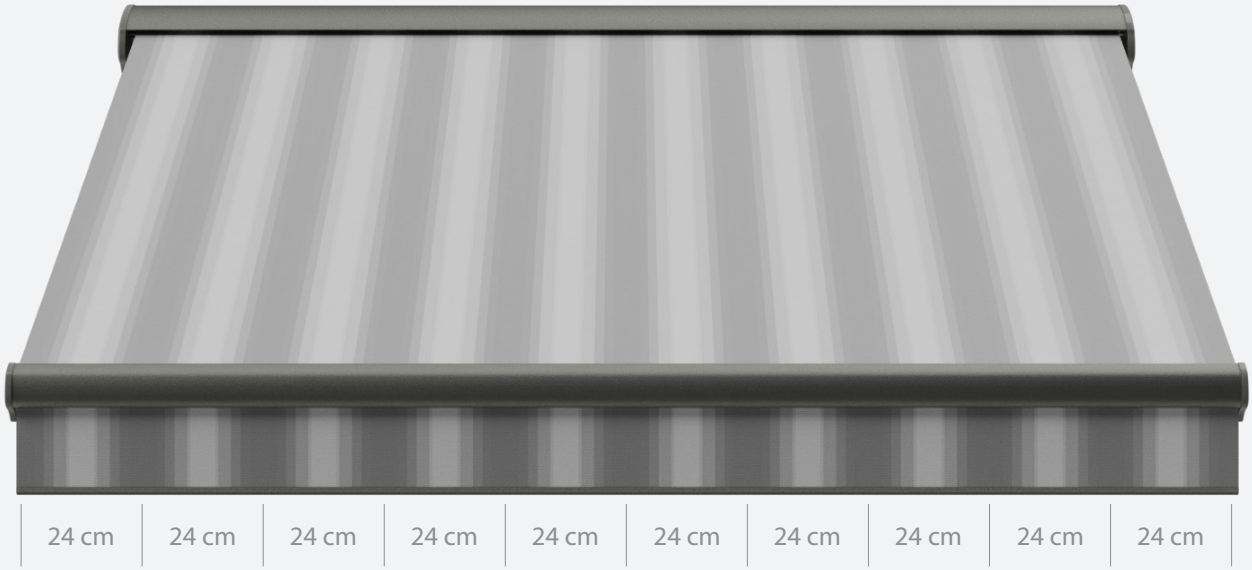


Multiply repeated pattern of fabric, expressed in cm and given in the chart.





SCREEN FABRICS

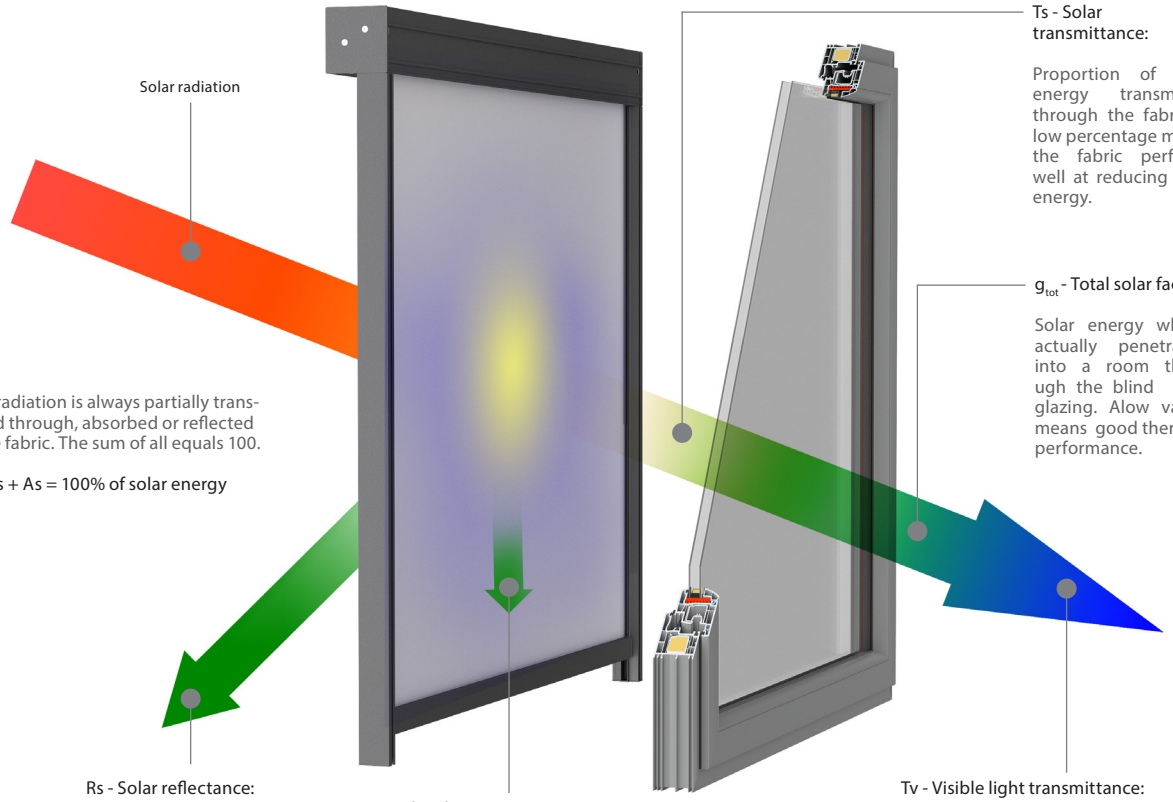

Solar radiation is always partially transmitted through, absorbed or reflected by the fabric. The sum of all equals 100.

Ts + Rs + As = 100% of solar energy

Ts - Solar transmittance:

Proportion of solar energy transmitted through the fabric. A low percentage means the fabric performs well at reducing solar energy.

g_{tot} - Total solar factor

Solar energy which actually penetrates into a room through the blind and glazing. Alow value means good thermal performance.

Rs - Solar reflectance:


Proportion of solar radiation reflected by the fabric. A high percentage means the fabric performs well at reflecting solar energy.

As - Solar absorptance:

Proportion of solar radiation absorbed by the fabric. A low percentage means the fabric absorbs little solar energy.

Tv - Visible light transmittance:

Total percentage of light radiated through the fabric over a wavelength of 380 to 780 nm (nanometers), called the visible spectrum (total illumination).

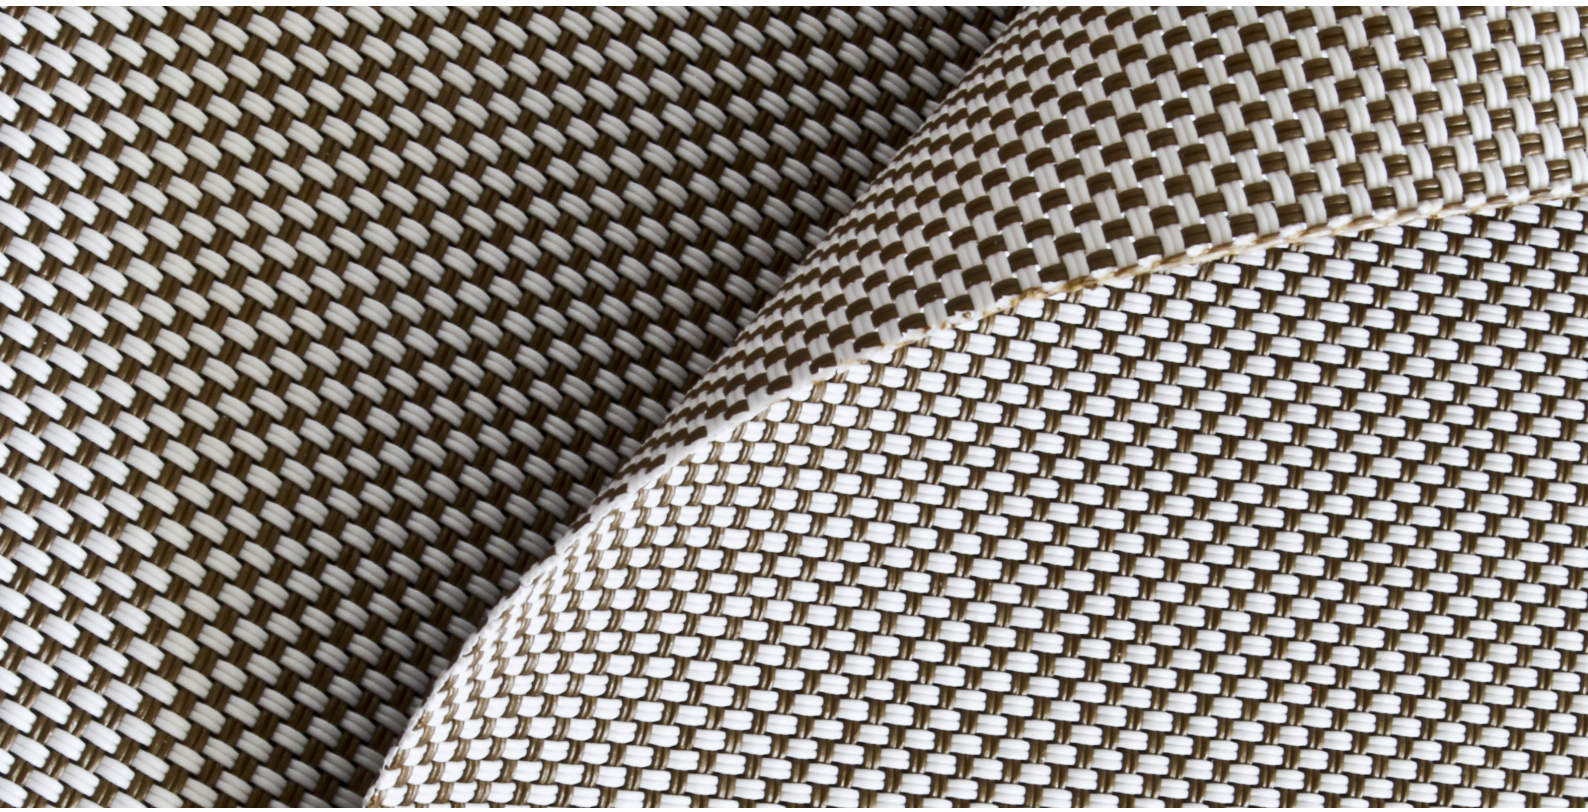

OPENNES FACTOR:

Relative area of the openings in the fabric. It is considered as independent of the colour.
For fabric with the same weave, it should be measured using the darkest colour in the range.

SERGE 1 % / SERGE 600

Collection of fabrics made from fiberglass covered with PVC. Fabrics made of this group have a distinctive diagonal „serge" weave, which guarantees them an unusual dimensional stability. High fire resistance and very good technical parameters of fabrics provide users with visual comfort in rooms, thus protecting against overheating the interior.

POLYSCREEN

Wide group of technical polyester fabrics coated with PVC, characterized by variety of weaving patterns and properties (PS Luminous, PS 550, PS 350). This allows architects to select the right solution, increasing visual attractiveness of the building and to emphasize its individual character. High technical parameters provide optical and thermal comfort inside the room. An additional feature of the fabric is the ease to keep it clean.

BLACK OUT

High-end blackout fabrics (Serge 600 BO Lunar, Polyscreen 314 BO) effectively block sunlight coming into the room. It is ideal solution for conference rooms, audio-visual, photographic studios, etc. High dimensional stability, high technical parameters and interesting colours are without a doubt advantages of fabrics in this group.

SUNWORKER


Smooth polyester fabric finished with PVC. Unique structure of the fabric effectively stops the sunlight, allowing for just optimal amount of visible light to transmit inside the room, providing high comfort to its users. The advantages of this fabric are: color fastness, high resistance to weather conditions and easy to maintain clean.

SOLTIS 92 / SOLTIS 99

Polyester technical fabric coated with PVC, manufactured with patented technology Precontraint Ferrari®. The unique technology gives fabric high stability and protects it against deformations even in large size blinds. High technical parameters guarantee optical and thermal comfort. The quality components used in production of this fabric ensures color fastness. Thanks to the smooth surface, the fabric is difficult to absorb dirt or get stained.


ACOUSTIC - VEROGLIM

Elegant fabric, made from the highest quality non-flammable polyester fibers Trevira® CS, intended for indoor use. Because of its weight, the fabric is ideally suited for cassette systems. An important advantage of this fabric is high coefficient of acoustics. Thanks to its structure, the fabric absorbs sound and mutes the room. Another advantage is metallic surface that reflects bright light and in this way regulates its intensity in the room.

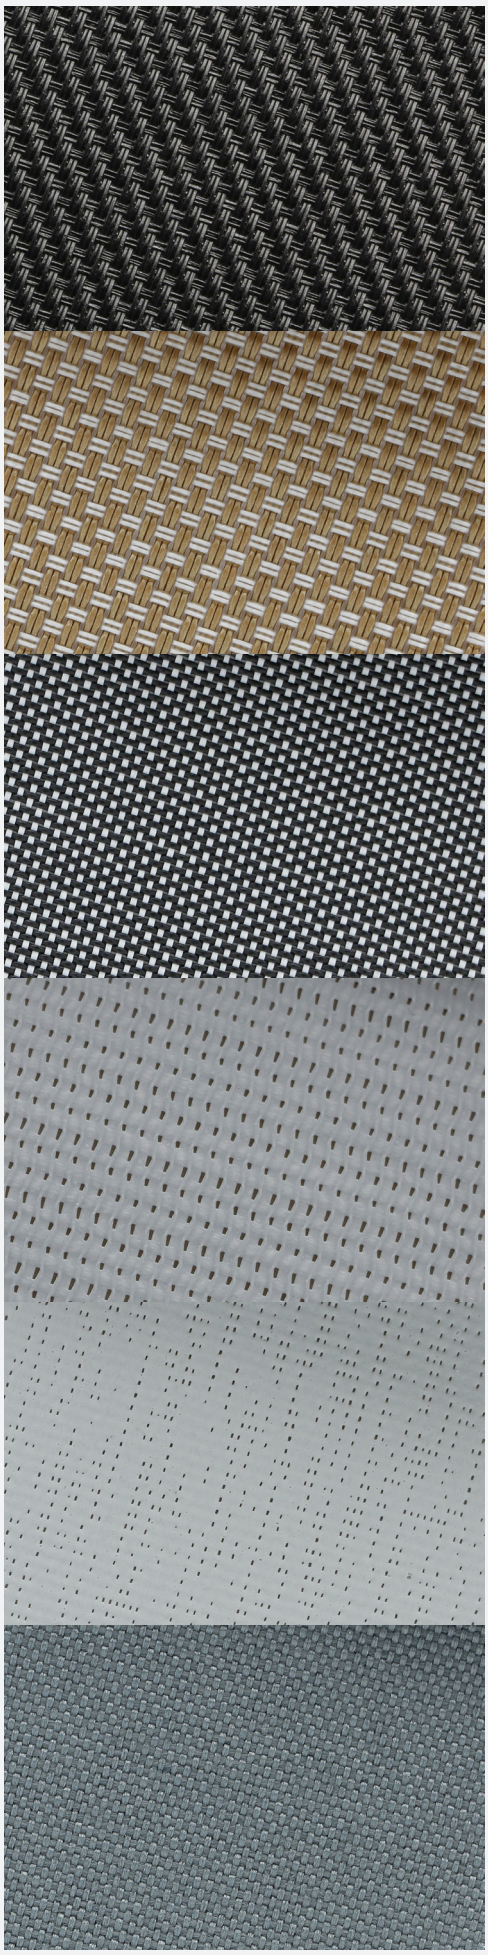


SERGE 600

WHITE - WHITE

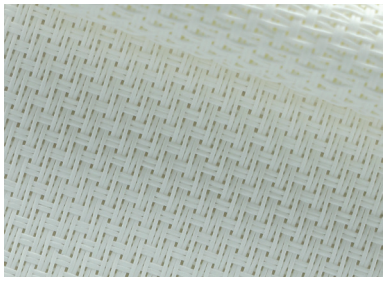


60002002

GREY - WHITE

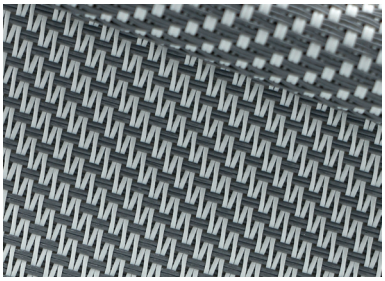


60001002

PEARL - GREY

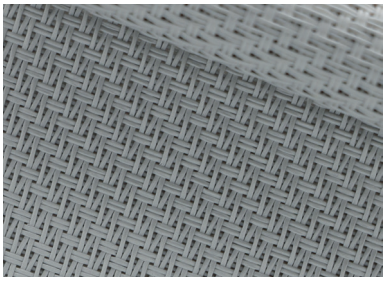


60007007

GREY - GREY

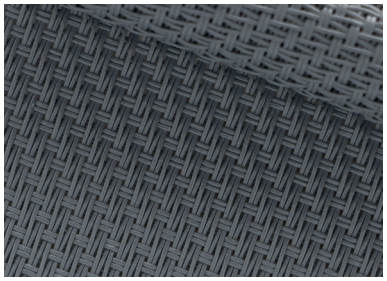


60001001

GREY - CHARCOAL

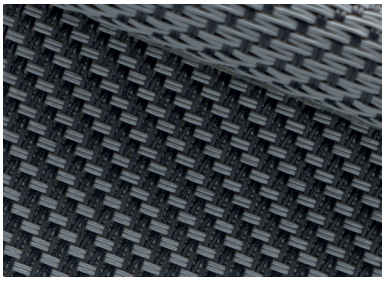

60001010

CHARCOAL - CHARCOAL

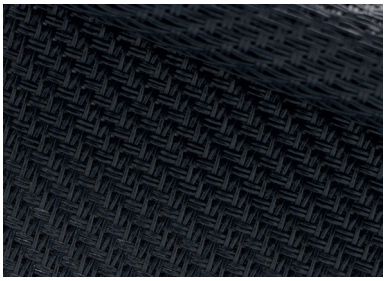


60010010

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02 EN ISO 105 B04	openness factor [%]	EN 14501 TS [%]	EN 14501 RS [%]	EN 14501 AS [%]	EN 14501 TV [%]	application	SERGE 600
White - White	42% glasfibre + 58% pvc	525	0.74	>7	5	21/21	65.9/66.3	13.2/12.7	21.2/21.2	interior / exterior	
Grey - White						6.7/6.7	37.2/26.9	56.2/66.4	6.6/6.6		
Pearl - Grey						10.1/10.1	38.3/39.4	51.7/50.5	8.4/8.4		
Grey - Grey						3.5/3.5	15.1/15.1	81.3/81.4	3.6/3.6		
Grey - Charcoal						3.6/3.6	9.9/12.6	86.5/83.8	3.6/3.6		
Charcoal - Charcoal						3.6/3.6	5.0/4.8	91.4/91.6	3.6/3.6		

Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 8.5, Weft: 7.5
Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 260, Weft: 225
Certificates - ask for availability


SERGE 600

PURE BLACK

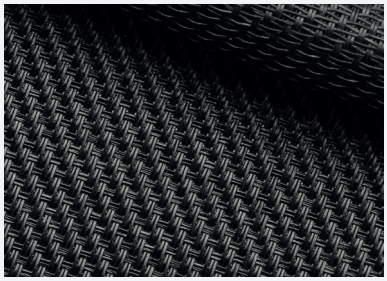

60030030

CHARCOAL - BRONZE

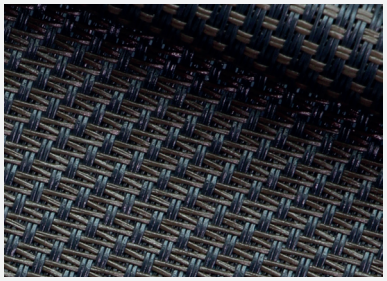

60010011

SANDSTONE



60033033

GREY - SAND



60001003

LINEN - LINEN



60008008

LINEN - WITE




60008002

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02 EN ISO 105 B04	openness factor [%]	EN 14501				application	SERGE 600
						TS [%]	RS [%]	AS [%]	TV [%]		
Pure Black	42% glasfibre + 58% pvc	525	0.74	>7	5	5.9	3.7	90.4	5.9	interior / exterior	
Charcoal - Bronze						6.1	6.5/6.0	87.4/87.9	6.1		
Sandstone						7.1	20.4/20.5	72.4/72.5	6.8		
Grey - Sand						4.7	26.5/21.5	68.8/73.8	4.5		
Linen - Linen						14.9	52.5/52.7	32.5/32.4	12.9		
Linen - White						15.5	58.2/56.4	26.4/28.1	13.7		
Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 8.5, Weft: 7.5 Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 260, Weft: 225 Certificates - ask for availability											


SERGE 1%

WHITE - WHITE

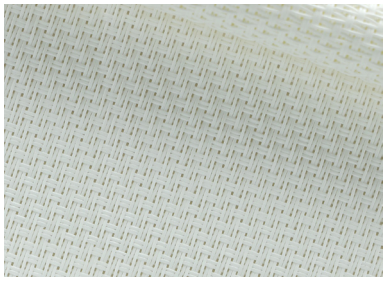


61002002

GREY - WHITE

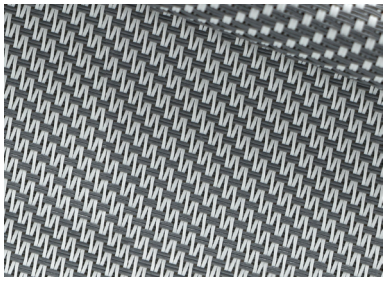


61001002

PEARL - GREY

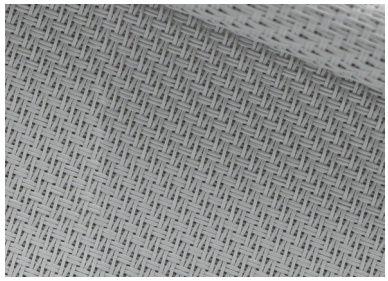


61007007

GREY - GREY

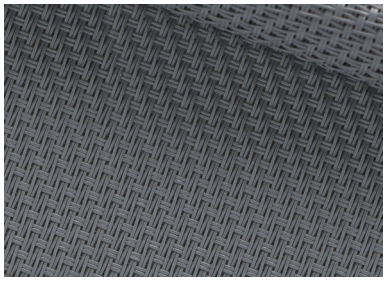


61001001

GREY - CHARCOAL

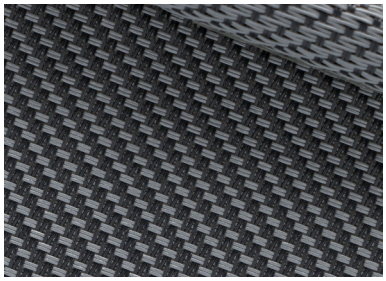


61001010

CHARCOAL - CHARCOAL

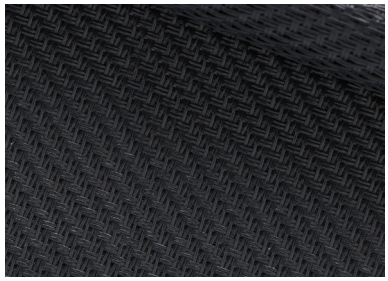

61010010

BRONZE - BRONZE

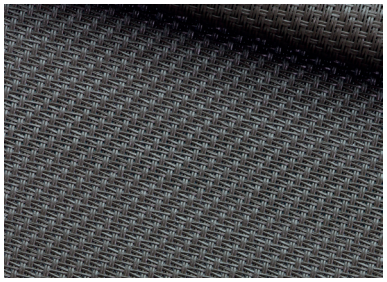

61011011

LINEN - LINEN



61008008


	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02 EN ISO 105 B04	openness factor [%]	EN 14501				application	SERGE 1%
						TS [%]	RS [%]	AS [%]	TV [%]		
White - White	42% glasfibre + 58% pvc	638	0.78	>7	1	12.8	71.3	15.9	12.9	interior / exterior	
Grey - White						2.2	44.8/31.2	53/66.6	2		
Pearl - Grey						2.8	36.9	60.3	2.1		
Grey - Grey						2.4	17.4	80.2	2.2		
Grey - Charcoal						1.2	10.5/14	88.3/84.8	1.2		
Charcoal - Charcoal						1.1	5.9	93	1.1		
Bronze - Bronze						1.4	8.6	90	1.3		
Linen - Linen						5.9	54.2	39.9	3.7		

Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 5.9, Weft: 6.2
Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 321, Weft: 277
Certificates - ask for availability

SERGE 600


BO LUNAR

WHITE - WHITE

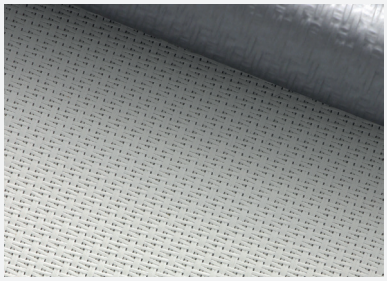


6BO002002

WHITE - PERL GREY

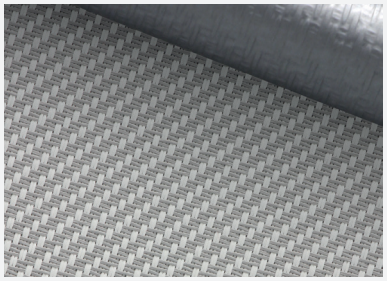


6BO002007

PEARL GREY - PEARL GREY

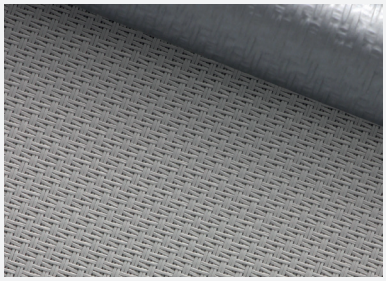


6BO007007

WHITE - GREY

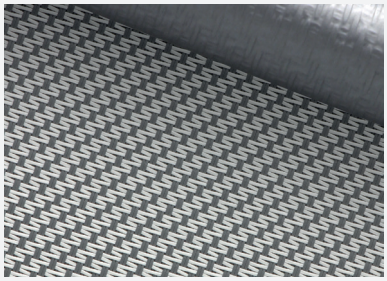


6BO001002

OYSTER SHELL

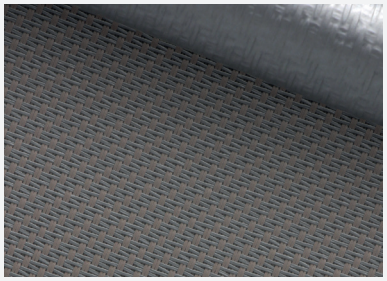


6BO033001

GREY - GREY

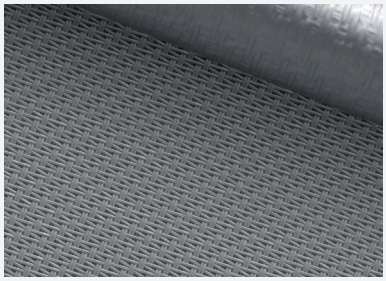


6BO001001

GREY - CHARCOAL

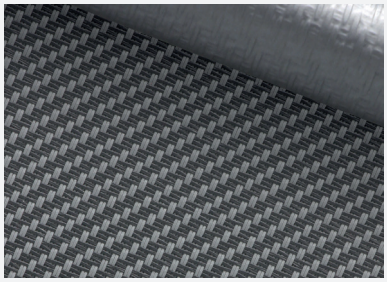

6BO001010

CHARCOAL - CHARCOAL

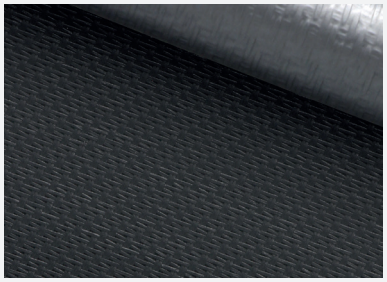

6BO010010


	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B04	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
White - White	33% GLASFIBRE 47% PVC 20% PVC LAMINATE	678	0.73	>7	0	0	68.8/33.7	31.2/66.3	0	interior / exterior
White - Perl Grey						0	47.8/33.2	52.2/66.8	0	
Pearl Grey - Pearl Grey						0	35.5/34	64.5/66	0	
White - Grey						0	40.3/33.7	59.7/66.3	0	
Oyster Shell						0	18.2/33.4	81.8/66.6	0	
Grey - Grey						0	17.2/33.1	82.8/66.9	0	
Grey - Charcoal						0	11/33.7	89/66.3	0	
Charcoal - Charcoal						0	6.2/33.4	93.8/66.6	0	

Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 8.5, Weft: 9
Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 224.2, Weft: 176.6
Certificates - ask for availability

SERGE 600 BO LUNAR


POLYSCREEN® 550

ASH (EBONY - GREY)

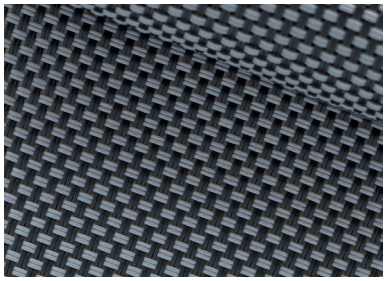


10550017

PEARL - GREY

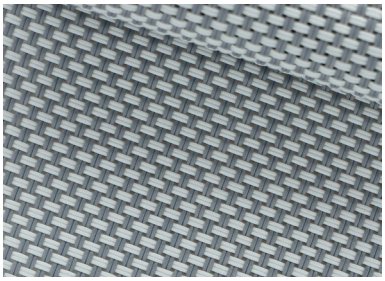


10550013

WHITE - GREY

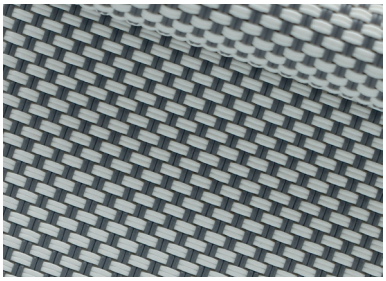


10550012

WHITE - PEARL

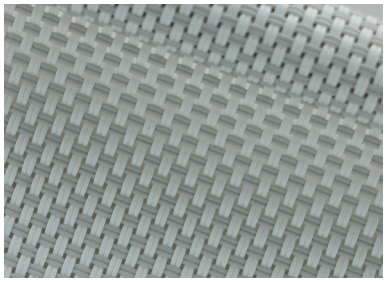


10550011

PEARL - SAND

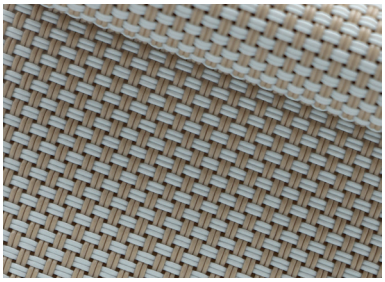

10550023

PEARL - LINEN

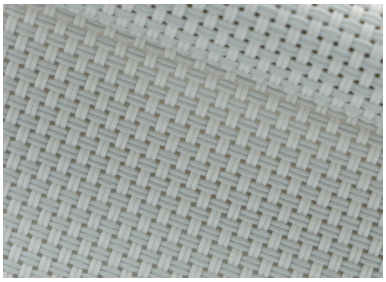


10550021

WHITE - LINEN



10550019

WHITE

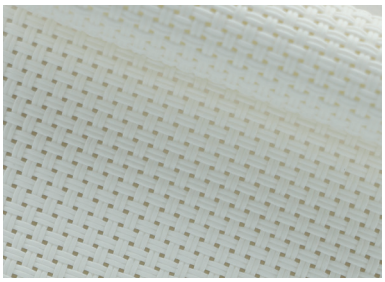

10550009

POLYSCREEN® 550

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method TS [%]	internal method RS [%]	internal method AS [%]	internal method TV [%]	application
Ash (Ebony - Grey)	85% PVC + 15% PES	610 ± 5%	0,78 ± 5%	8/8	5/5	5	6	7	87	6	interior / exterior
Pearl - Grey				8/8	5/5		11	29	60	9	
White - Grey				≥7/8	≥ 4/5		13	37	50	12	
White - Pearl				≥7/8	≥ 4/5		16	57	27	12	
Pearl - Sand				8/8	5/5		14	36	50	10	
Pearl - Linen				8/8	5/5		17	46	37	12	
White - Linen				≥7/8	≥ 4/5		20	63	17	16	
White				7 /8	4/5		19	69	12	15	


Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp: 6.6, Weft: 5.3
Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 174, Weft: 133
Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 22%, Weft: 21%
Certificates - ask for availability

0338

POLYSCREEN® 550


GOLD & SILVER

EBONY - GOLD

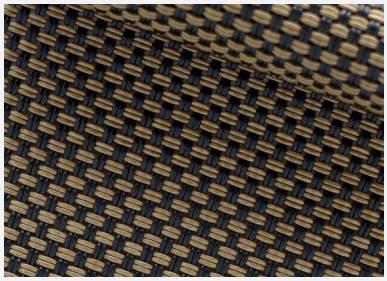


10550051

LINEN - GOLD

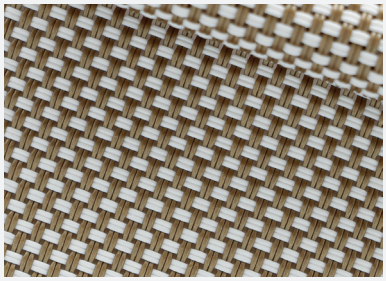


10550053

BRONZE - SILVER

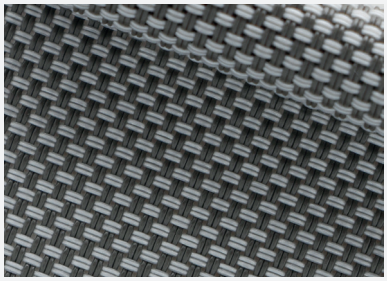

10550041

GREY - SILVER

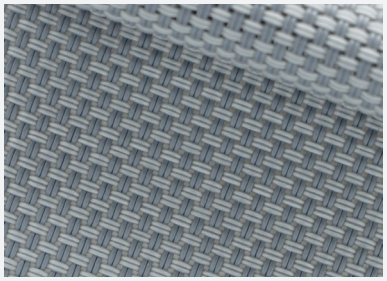

10550042

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
							TS [%]	RS [%]	AS [%]	TV [%]	
Ebony - Gold	85% PVC + 15% PES	610 ± 5%	0.78	8/8	5/5	5	11	8	81	10	interior / exterior
Linen - Gold							13	25	62	14	
Bronze - Silver							17	14	69	17	
Grey - Silver							16	17	67	17	


POLYSCREEN® 550 GOLD & SILVER

* On request
Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp 6.6 , Weft 5.3
Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp 174, Weft 133
Stretch (%) UNE EN ISO 13934-1:1999 - Warp 22 , Weft 21
Certificates - ask for availability

0338


POLYSCREEN® 350

ASH (EBONY - GREY)

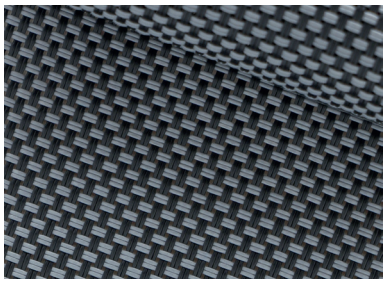

10550017

PEARL - GREY

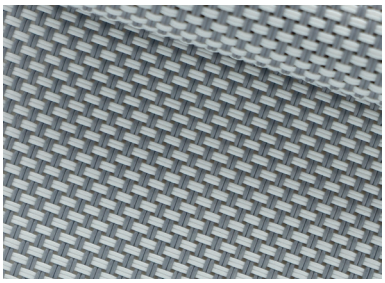


10550013

WHITE - LINEN



10350019

WHITE

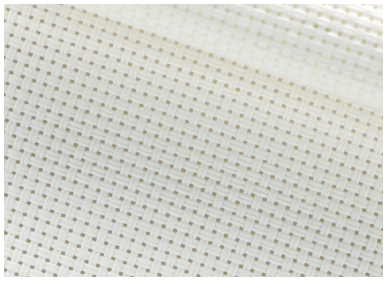

10350009

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
							TS [%]	RS [%]	AS [%]	TV [%]	
Ash (Ebony - Grey)	75% PVC + 25% PES	400 ± 5%	0.53 ± 5%	8/8	5/5	10	10	8	82	10	Interior
Pearl - Grey				8/8	5/5		16	26	58	14	
White - Linen				≥7/8	≥ 4/5		27	58	15	23	
White				7/8	4/5		25	64	11	22	


Tearing resistance (daN) UNE EN ISO 13937-3:2001- Warp: 4.9, Weft: 4.7
Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 153, Weft: 136
Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 20%, Weft: 24%
Certificates - ask for availability

POLYSCREEN® 350

0338


POLYSCREEN®
LUMINOUS

ARIZONA

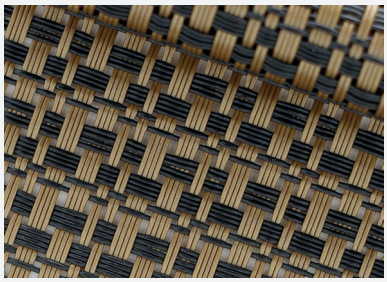


10550061

SAHARA A

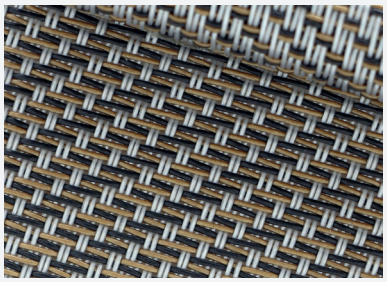


10550062

SAHARA B

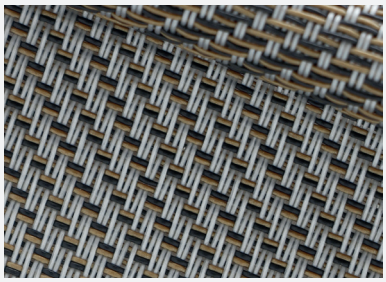


10550062

ATACAMA

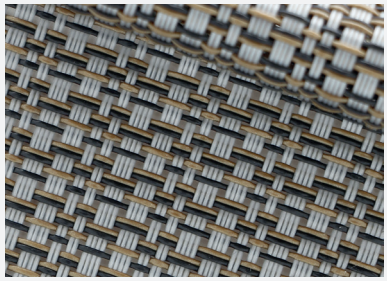

10550065

MOJAVE

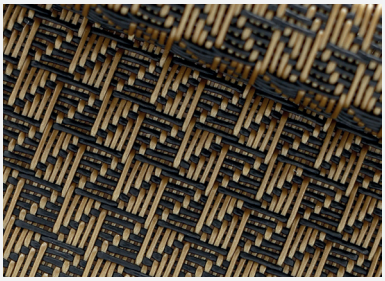

10550066


	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
							TS [%]	RS [%]	AS [%]	TV [%]	
Arizona	85% PVC + 15% PES	511 ± 5%	0.78	8/8	5/5	13	15	10	75	16	interior / exterior
Sahara A		612 ± 5%	0.82			6	10	15	75	11	
Sahara B		612 ± 5%	0.82			6	10	12	78	10	
Atacama		594 ± 5%	0.77			10	20	14	66	22	
Mojave		516 ± 5%	0.90			11	14	8	78	14	

Tearing resistance (daN) - On request
Breaking strength (daN/5cm) - On request
Stretch (%) UNE EN ISO 13934-1:1999 - On request

POLYSCREEN® LUMINOUS


POLYSCREEN® 550
COUPAGE

COUPAGE 1

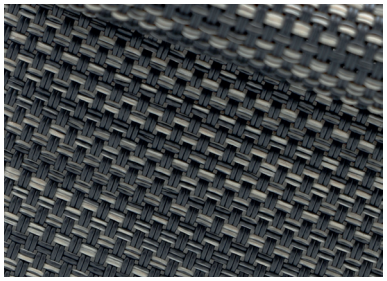


10550031

COUPAGE 2

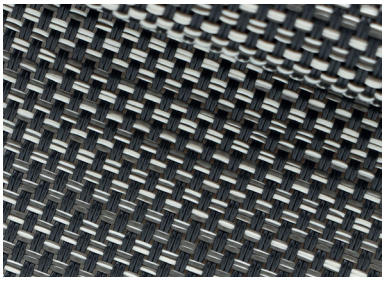


10550032

COUPAGE 3

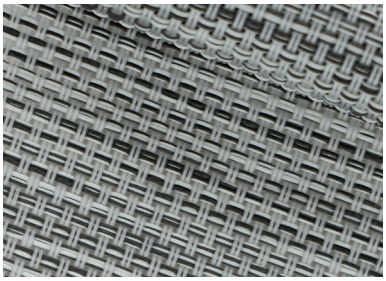

10550033

COUPAGE 4

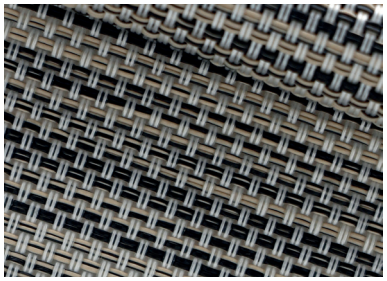

10550034

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
							TS [%]	RS [%]	AS [%]	TV [%]	
Coupage 1	85% PVC + 15% PES	610 ± 5%	0.78	8/8	5/5	5	*	*	*	10	interior / exterior
Coupage 2							*	*	*	12	
Coupage 3							*	*	*	19	
Coupage 4							*	*	*	17	

* On request
Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp 6.6 , Weft 5.3
Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp 174, Weft 133
Stretch (%) UNE EN ISO 13934-1:1999 - Warp 22, Weft 21
Certificates - ask for availability


POLYSCREEN® 550 COUPAGE

0338

POLYSCREEN® 314


BLACK OUT

EBONY - GREY

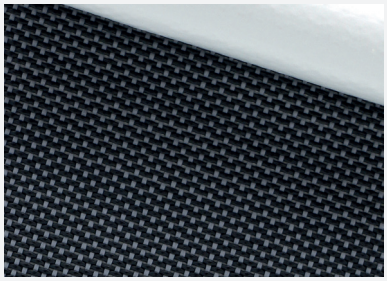


10314B20

EBONY - LINEN

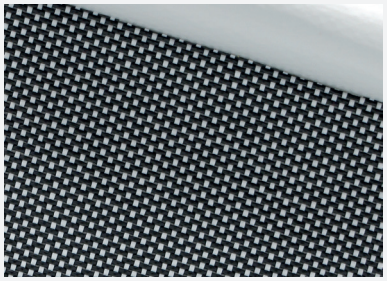


10314B08

LINEN - BRONZE

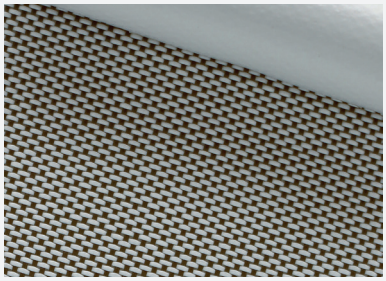


10314B06

WHITE

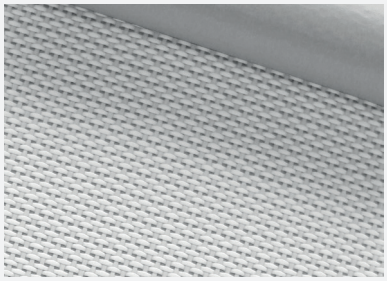


10314B02

LINEN - SAND

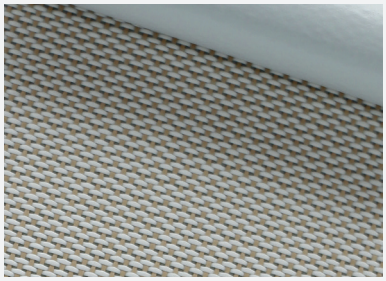

10314B04

EBONY - SAND

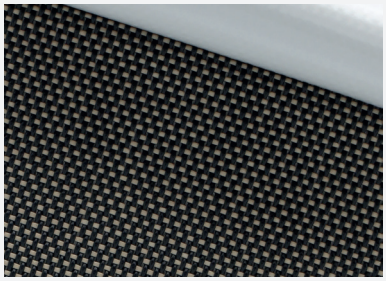

10314B10

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	EN 14501				application
							TS [%]	RS [%]	AS [%]	TV [%]	
Ebony - Grey	80% PVC + 20% PES coated with PVC	610 ± 5%	0.66 ± 5%	8 / 8	4/5	0	0	36	64	0	Interior
Ebony - Linen				8 / 8							
Linen - Bronze				8 / 8							
White				7 / 8							
Linen - Sand				8 / 8							
Ebony - Sand				8 / 8							


Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp: 4.4, Weft: 2.5
Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 147, Weft: 91
Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 26.7%, Weft: 17.6%
Certificates - ask for availability

POLYSCREEN® 314 BLACK OUT

0338


SUNWORKER

WHITE

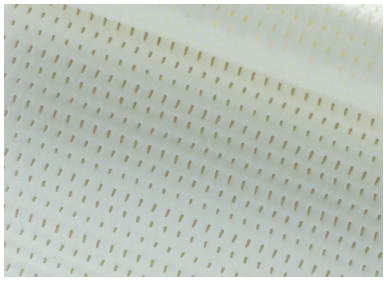


40SWK005

IRON

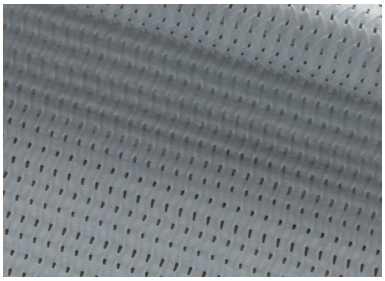

40SWK653

CHAMPAGNE

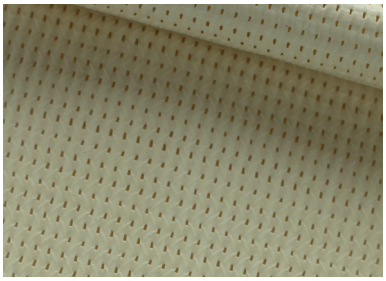

40SWK711

CHARCOAL




40SWK392

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 105 B04	openness factor [%]	EN 14501				application	SUNWORKER
							TS [%]	RS [%]	AS [%]	TV [%]		
White	Polyester / PVC	300	0.42	7/8	4-5/5	6	23	66	11	21	interior / exterior	
Iron						6	12	35	53	10		
Champagne						6	21	50	29	18		
Charcoal						6	6	7	87	6		

Tearing strength (daN/5cm) DIN 53363 - Warp: 70, Weft: 35
Tensile strength (daN/5cm) NF EN ISO 13934-1 - Warp: 220, Weft: 150
Certificates - ask for availability


SOLTIS® 92

DEEP BLACK

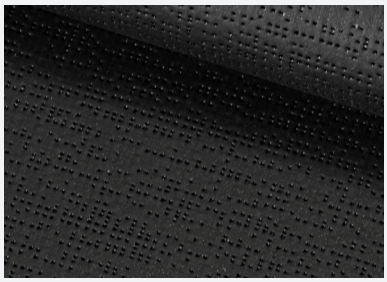


509251176

CHARCOAL

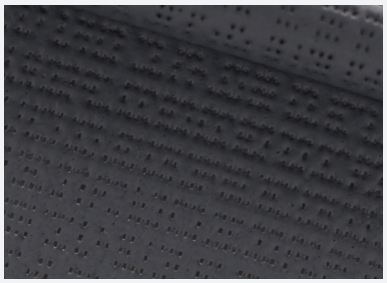


50922047

CONCRETE

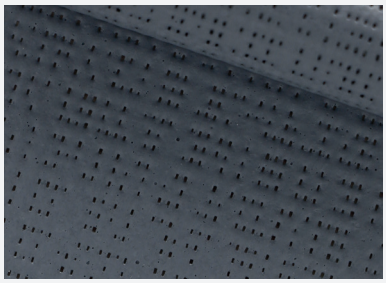


50922167

SILVER

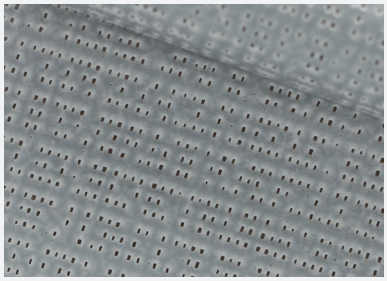


50922048

SILVER BLACK

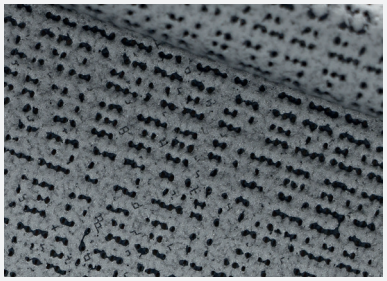


50922045

SILVER - WHITE

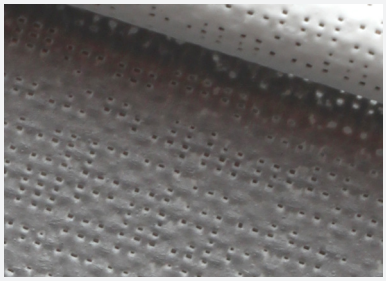


50922051

SANDY BEIGE

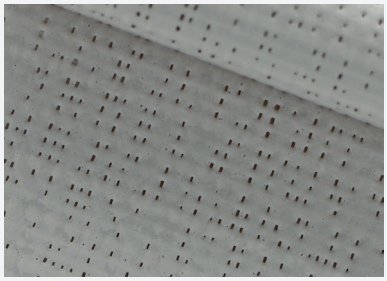

50922135

WHITE

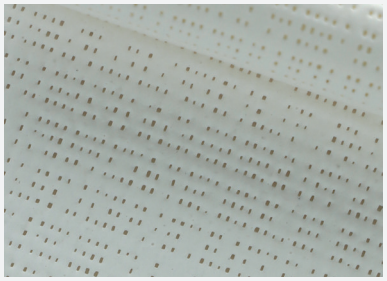

50922044


	composition	weight [g/m²]	thickness [mm]	light fastness grey scale level EN ISO 105 B04	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
Deep Black	Polyester / PVC	420	0.45	5/5	4	3	5	92	3	interior / exterior
Charcoal				5/5		5	8	87	5	
Concrete				4/5		6	19	75	5	
Silver				4/5		8	46	46	8	
Silver Black				5/5		4	35	61	4	
Silver - White				4/5, 3-4/5		12/12	49/70	39/18	11/11	
Sandy Beige				5/5		11	46	43	8	
White				2/5		19	68	13	17	

Tear strength (daN) DIN 53.363 - Warp: 45, Weft: 20
Tensile strength (daN/5cm) EN ISO 1421 - Warp: 310, Weft: 210
Certificates - ask for availability

SOLTIS® 92


SOLTIS® 99

WHITE

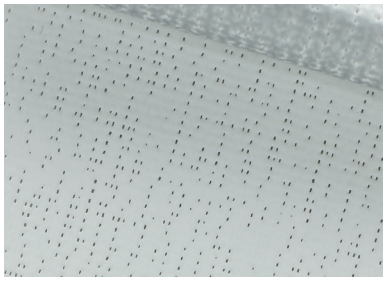

50992055

QUARTZ

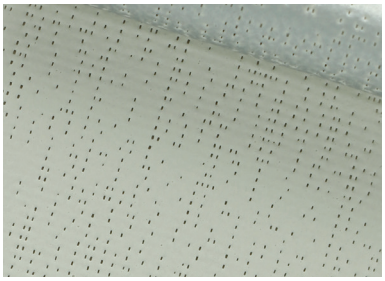


509950285

SANDY BEIGE




509950286

SPUME

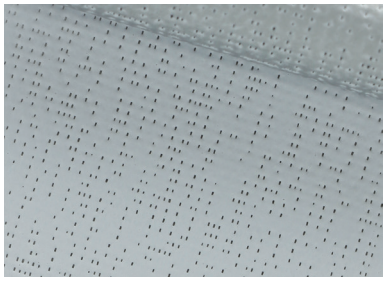


509950284

LIGHT GREY

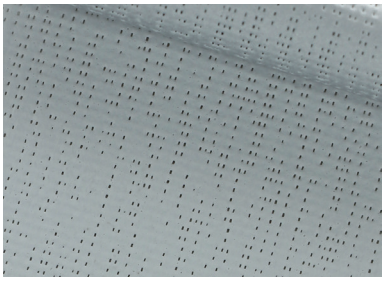


50992058

ALU

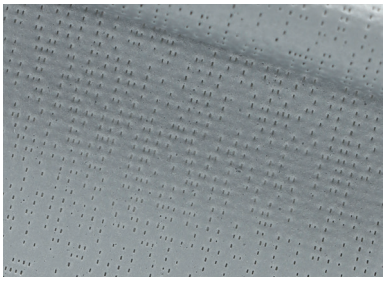

50992059

ANTRACITE

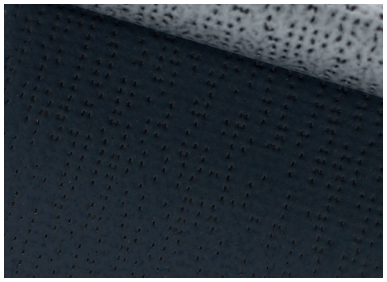

50992068


	composition	weight [g/m²]	thickness [mm]	light fastness grey scale level EN ISO 105 B04	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
White	Polyester / PVC	290	0.32	5/5, 3- 4/5	3	14/14	47/63	39/23	13	interior
Quartz				5/5, 5/5		11/11	47/60	42/29	9	
Sandy Beige				5/5, 5/5		10/10	43/44	47/46	7	
Spume				5/5, 4-5/5		12/12	47/60	41/28	9	
Light Grey				5/5, 5/5		8/8	44/43	48/49	6	
Alu				5/5, 5/5		6	43	51	5	
Antracite				5/5, 5/5		3/3	33/8	64/89	3	

Tear strength (daN) DIN 53.363 - Warp: 11, Weft: 13
Tensile strength (daN/5cm) EN ISO 1421 - Warp: 160, Weft: 170
Certificates - ask for availability

SOLTIS® 99

VEROGLIM
ACOUSTIC

GREY - SILVER

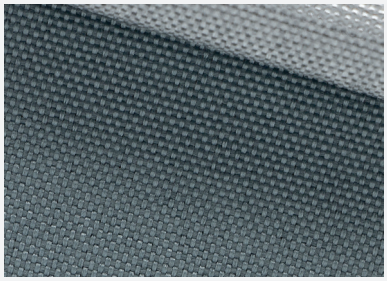


34022115

LIGHT GREY - SILVER




34022114

WHITE - SILVER

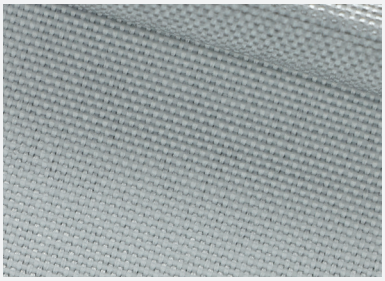

34022111

IVORY - SILVER

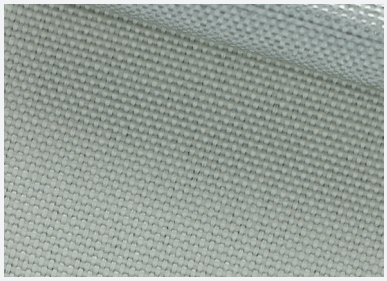

34022113

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	openness factor [%]	DIN EN 410				application	VEROGLIM ACOUSTIC
						TS [%]	RS [%]	AS [%]	TV [%]		
Grey - Silver	Trevira CS	220	0.43	5-6/8	1	5	50	45	2	interior	
Light Grey - Silver						5	52	43	4		
White - Silver						7	52	41	7		
Ivory - Silver						6	49	45	6		
Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 95, Weft:130 Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 35%, Weft: 23% Certificates - ask for availability											

PERGOLA SOLID
FABRICS



PRECONTRAINT 602 OPAQUE

Technical specifications

	Values	Standards
Yarn	1100 dtex PES HT	Tersuisse
Weight	750 g/m²	EN ISO 2286-2
Width	267 cm	-
Tensile strength (warp/weft)	230/220 daN/5cm	EN ISO 1421
Tear strenght (warp/weft)	20/20 daN	DIN 53.363
Elongation under load (warp/weft)	<1%/<1%	NF EN 15619
Adhesion	9/9 daN/5cm	EN ISO 2411
Finish	Varnish both sides	-
Flame retardancy	• M2/NFP 92-507 • B1/DIN4102-1 • M2/UNE23.727-90 • BS 7837 • 1530.3/AS NZS • Method 2/NFPA 701 • CSFM T19 •	
Cold resistance	-30°C	ISO 4675
Heat resistance	+70°C	

BLANC 602N OPAQUE 8503

BEIGE 602N OPAQUE 0020




PRECONTRAINT 702 OPAQUE

Technical specifications

	Values	Standards
Yarn	1100 dtex PES HT	Tersuisse
Weight	830 g/m²	EN ISO 2286-2
Width	267 cm	
Tensile strength (warp/weft)	280/280 daN/5 cm	EN ISO 1421
Tear strength (warp/weft)	30/28 daN	DIN 53.363
Adhesion	10/10 daN/5 cm	EN ISO 2411
Finish	Acrylic varnish both sides Aluminium face / Back grey	
Flame retardancy	M2/NFP 92-507 • TEST 2/NFPA 701 • CSFM T19 • B1/DIN 4102-1 • BS 7837 • GROUP 1/AS/NZS 3837 • 1530.3/AS/NZS • SITAC/SIS 650082 • Schwerbrennbar Q1-Tr1/ONORM A 3800-1 • CLASSE 2/UNI 9177-87 • M2/UNE 23.727-90 • VKF 5.2/SN 198898 • B-s2,do/EN 13501-1	
Cold resistance	-30°C	
Heat resistance	+70°C	


ALU GREY 702 OPAQUE 1285

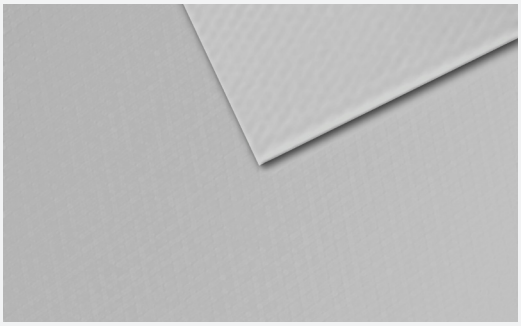


SERVICE QUALITÄT
TOP SERVICE
KOMPETENZ SUPPORT
SERVICE QUALITÄT
PREMIUM SERVICE
KOMPETENZ 24/7 SUPPORT
e.U.
SUNKEEPER
Genieße die Sonne ! Im Schatten !!
Rollläden - Raffstore - Zip - Pergola - Markisen - Montagen

COLOURS

COATINGFINISH

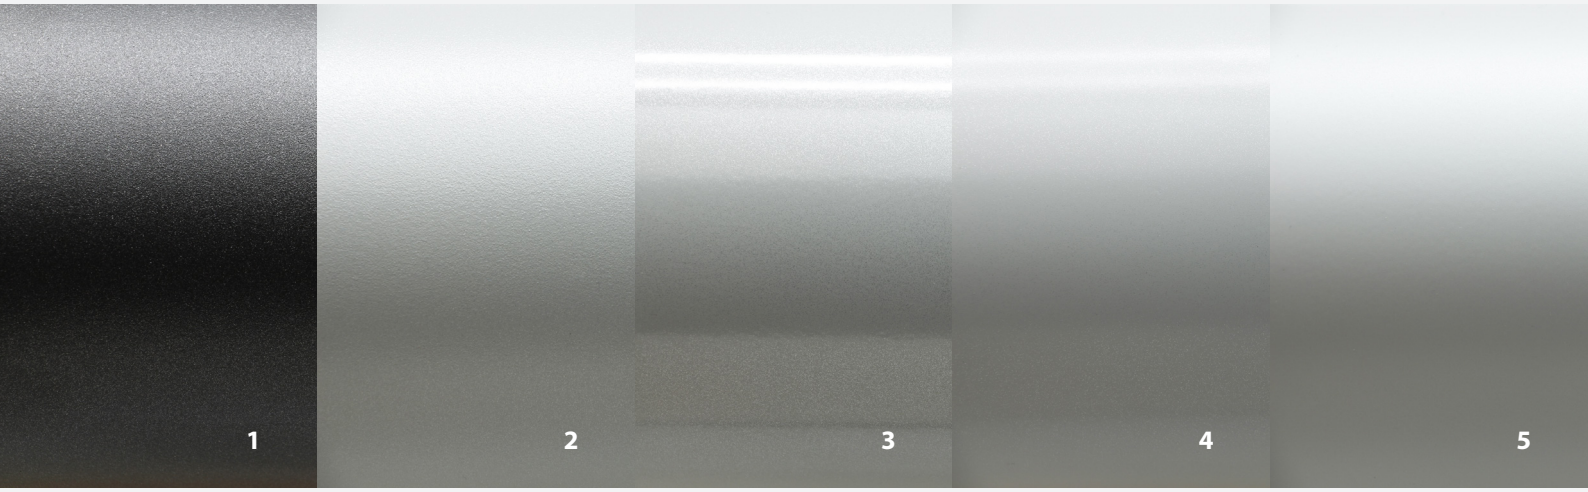

1. *"fine structure - pearl mat"*
2. *"fine structure"*
3. *satin finish*
4. *mat finish*
5. *"artificial anode"*

CONSTRUCTION COLOURS

Presented colour chart shows colours available within Selt collection for powder coated construction elements of Refleksols, venetian blinds and sunbreakers. Conditions of painting in colours included in the collection below and in other RAL colours – according to rules described in price lists of individual products. Because of technical and production reasons as well as due to different coating techniques, differences in colours between product components are possible. Presented pictures are for illustration purposes only. Colours may vary from actual ones. Any difference in shade does not constitute grounds for complaint.

SLATS COLOURS

Presented colour chart shows slat colours available within SELT collection. Conditions of paiting in colours within Selt collection and other RAL colours – according to rules described in price list of venetian blinds. Because of technical and production reasons as well as due to different coating techniques, differences in colours between product components are possible. Presented pictures are for illustration purposes only. Colours may vary from actual ones. Any difference in shade does not constitute grounds for complaint. Customized perforation (layout and size of openings) and painting in colours outside of SELT collection are subject to individual arrangements in terms of price and conditions of implementation.

SLAT COLOURS

C50 / C80 / C80F / Z90

RAL 1013

C80 / Z90

RAL 7012

C80 / Z90

RAL 7016

C50 / C80 / C80F / Z90

RAL 7021

C80 / Z90

RAL 7024

C80 / Z90

RAL7035

C80 / Z90

RAL 8014

C80 / Z90

RAL 9005*

C80 / Z90

RAL 9006

C50 / C80 / C80F / Z90

RAL 9007

C50 / C80 / C80F / Z90

RAL 9010

C50 / C80 / C80F / Z90

RAL 9016

C80

DB 703

C80 / Z90

VSR 240*

C80 / Z90

VSR 780*

C80 / Z90

Standard slat gloss 80% (satin)
* gloss 60% (semi-matt)

SLAT COLOURS

C50 SLIM

0005 (~ RAL 1013)

C50 SLIM

0204 (~ RAL 9003)

C50 SLIM

0030



C50 SLIM

0038 (~ RAL 9006)




C50 SLIM

9007 (~ RAL 9007)



C50 SLIM

2901



C50 SLIM

0199 (~ RAL 7024)




C50 SLIM

0019 (~ RAL 9011)




C50 SLIM

0204 PF (~ RAL 9003)



C50 SLIM

0038 PF (~ RAL 9006)



C50 SLIM

CONSTRUCTION

COLOURS

RAL 1013 MAT

RAL 1015 MAT

RAL 7001 MAT



RAL 7012 MAT



RAL 7015MAT



RAL 7016 MAT



RAL 7021 MAT



RAL 7022 MAT



RAL 7024 MAT



RAL 7035 MAT


RAL 7037 MAT




RAL 7039 MAT




RAL 7043 MAT



RAL 8003 MAT



RAL 8014 MAT



CONSTRUCTION
COLOURS

RAL 8016 MAT



RAL 9001 MAT

RAL 9005 MAT



RAL 9006 MAT



RAL 9007 MAT



RAL 9010 MAT

RAL 9016 MAT

DB 703 MAT



VSR 240 SATIN

VRS 780 MAT



FSM 71319 MAT





All specifications, design and color of products are up to date at time of forwarding this catalogue to print. The manufacturer reserves the right to make changes withour prior notice. Due to the printing process any color reproductions are for illustration purposes only, their deviation from the actual color cannot constitute grounds for complaint. Folder reproduction in whole or in part is forbidden without the written permission of SELT.